




12mm ISO METRIC THREAD

LEAD ACCURACY: ±6.25µm/25mm

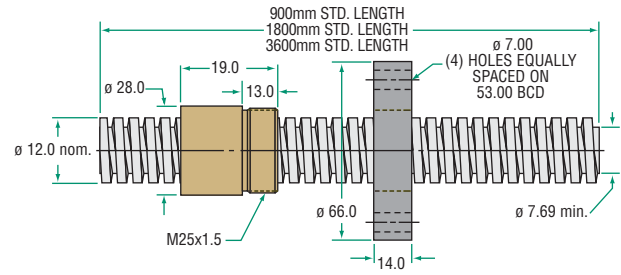

LOAD CAPACITY (N)	DYNAMIC	STATIC
BRONZE NUT	4963	15858
PLASTIC NUT	2481	2481

PRODUCT SPECIFICATIONS		SCREW SIZE	
		Tr 12x3	
Lead (mm)		3	
Pitch (mm)		3	
Starts		1	
Lash (Maximum Axial in mm)		0.16	
Weight (kg/m)		.70	
Thread Code		901	
900mm Standard Length Part No. *	RH	4140	14901
	Stainless		54901
1800mm Standard Length Part No. *	LH	4140	—
	Stainless		—
900mm Standard Length Part No. *	RH	4140	15901
	Stainless		55901
1800mm Standard Length Part No. *	LH	4140	—
	Stainless		—

* Custom Lengths Available - See page 47 to specify length

BRONZ/AC BRONZE NUT		Tr 12x3
Efficiency		33%
Torque to Raise 1 kN (N·m)		1.119
Weight (g)		84
Part No.	RH	20901
	LH	—

PLAST/AC PLASTIC NUT		Tr 12x3
Efficiency		48%
Torque to Raise 1 kN (N·m)		.989
Weight (g)		15
Part No.	RH	30901
	LH	—

FLANGE - STEEL		Tr 12x3
Weight (kg)		.31
Part No.		72002

METRIC LEAD SCREW AND NUT TECHNICAL DATA

LUBRICANT

Prolong lead screw and nut performance with these special lubricants.



E-100 12 Oz. Lead Screw Spray Lubricant




PAG-1 1 lb. Lead Screw Grease

See page 14 for complete product details.

END MACHINING

Machining for Nook standard ends or custom requirement available.



See page 212 for complete product details.