


ILA-10 HD

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ILA-10 HD today!

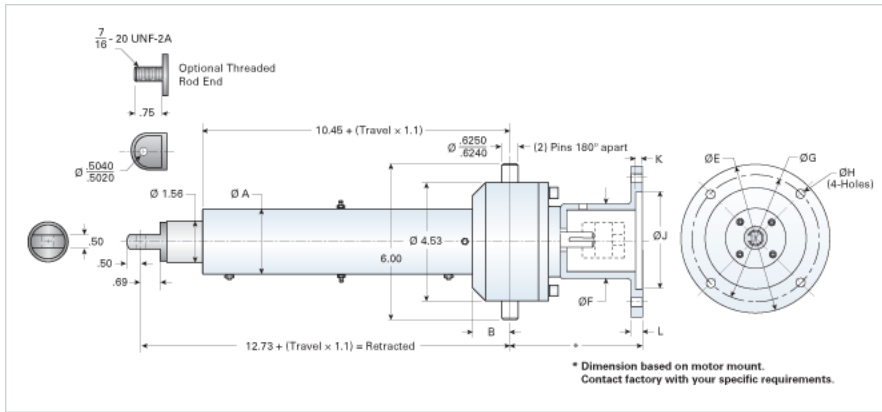

Performance Specifications

Maximum Travel Rate [in/min]	800
Dynamic Capacity [lb]	2200
Maximum Input Torque [in-lb]	77

Dimensions

A	2.5
B	1.44
C	
D	

Details

Ball Screw	0750-0200 SRT
Input Turns per Inch Of Travel	5
Torque to Raise 1 lb. [in-lb]	0.035
Screw Lead [in]	0.200
Root Diameter [in]	0.602
Max Capacity [lb]	2200
Max HP [hp]	2
Gear Ratio	1:1

Weight

Basic Weight [lb]	32
Per Inch of Travel [lb]	0.98