


ILA-100 HD

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ILA-100 HD today!

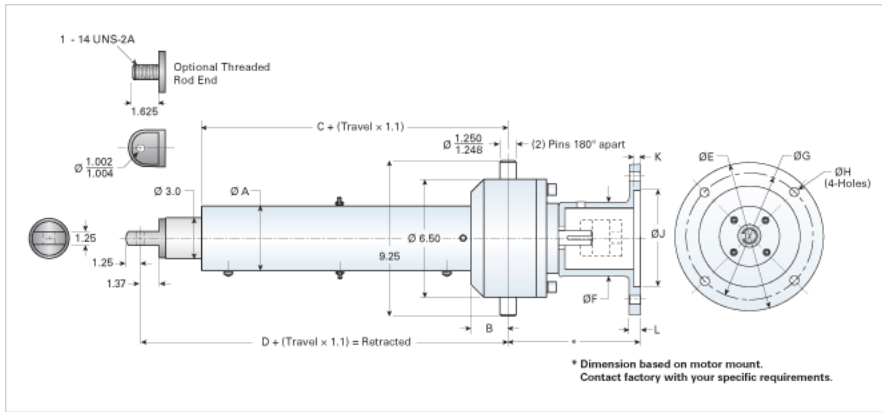

Performance Specifications

Maximum Travel Rate [in/min]	946
Dynamic Capacity [lb]	9000
Maximum Input Torque [in-lb]	756

Dimensions

A	4
B	2.5
C	14.18
D	17.14

Details

Ball Screw	1500-0473 SRT
Input Turns per Inch Of Travel	2.11
Torque to Raise 1 lb. [in-lb]	0.084
Screw Lead [in]	0.473
Root Diameter [in]	1.140
Max Capacity [lb]	9000
Max HP [hp]	5
Gear Ratio	1:1

Weight

Basic Weight [lb]	89
Per Inch of Travel [lb]	2.08