


## ILA-200 HD

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your ILA-200 HD today!

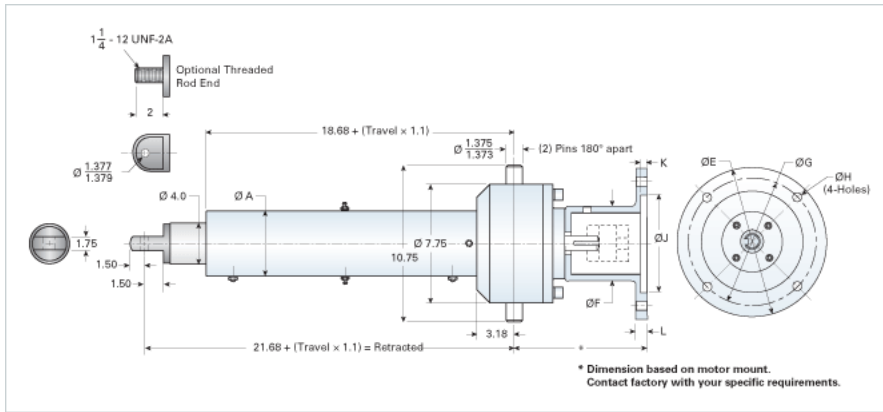

### Performance Specifications

|                              |       |
|------------------------------|-------|
| Maximum Travel Rate [in/min] | 667   |
| Dynamic Capacity [lb]        | 21000 |
| Maximum Input Torque [in-lb] | 1848  |

### Dimensions

|   |      |
|---|------|
| A | 5.25 |
| B |      |
| C |      |
| D |      |

### Details

|                                |               |
|--------------------------------|---------------|
| Ball Screw                     | 2250-0500 SRT |
| Input Turns per Inch Of Travel | 2             |
| Torque to Raise 1 lb. [in-lb]  | 0.088         |
| Screw Lead [in]                | 0.500         |
| Root Diameter [in]             | 1.850         |
| Max Capacity [lb]              | 21000         |
| Max HP [hp]                    | 7.5           |
| Gear Ratio                     | 1:1           |

### Weight

|                         |      |
|-------------------------|------|
| Basic Weight [lb]       | 194  |
| Per Inch of Travel [lb] | 3.06 |