


DD-506-HD/20XX

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DD-506-HD/20XX today!

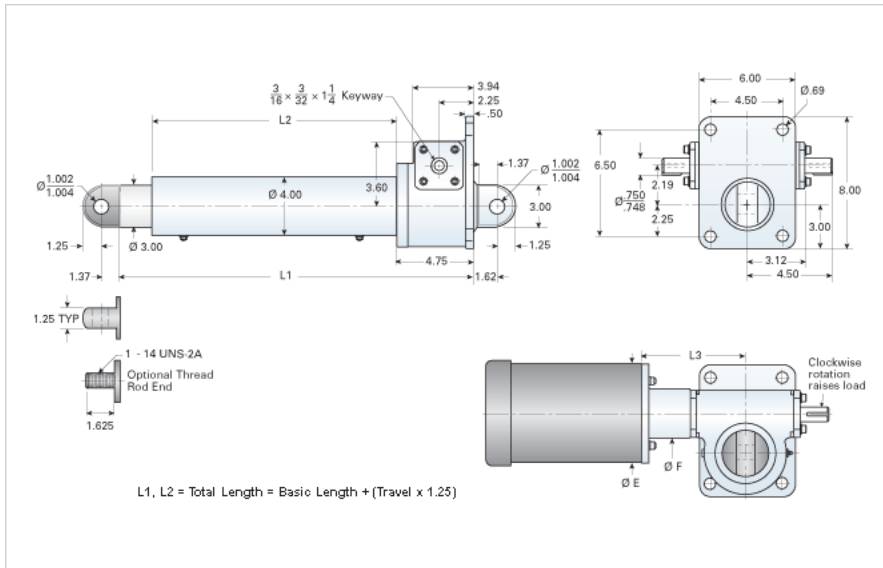

Performance Specifications

| | |
|--|----------|
| Travel Rate [in/min] | 136 |
| Dynamic Capacity [lb] | 3500 |
| Rated Life [in] | 18000000 |
| Motor Horse Power [hp] | 2 |
| Maximum Rod Reaction Torque [in-lb] | 320 |
| Std. Brake Torque [ft-lb] | 10 |
| Approximate Stopping Distance No Load [in] | 0.20 |
| Approximate Stopping Distance Full Load [in] | 0.46 |

Details

| | |
|--------------------------------|--------|
| Gear Ratio | 6:1 |
| Input Turns Per Inch Of Travel | 12.66 |
| Torque To Raise 1 lb. [in-lb] | 0.0183 |
| Max Capacity [lb] | 10000 |
| Max HP [hp] | 3 |

Weight

| | |
|-------------------------|------|
| Basic Weight [lb] | 63 |
| Per Inch of Travel [lb] | 1.92 |

Tube Dimensions

| | |
|----------------------|-------|
| L1 Basic Length [in] | 15.13 |
| L2 Basic Length [in] | 8.88 |

NEMA 42 Dimensions

| | |
|---------|---|
| L3 [in] | - |
| E [in] | - |
| F [in] | - |

NEMA 48 Dimensions

| | |
|---------|---|
| L3 [in] | - |
| E [in] | - |
| F [in] | - |

NEMA 56C Dimensions

| | |
|---------|------|
| L3 [in] | 7.25 |
| E [in] | 6.75 |
| F [in] | 3.75 |

NEMA 182TC Dimensions

| | |
|---------|------|
| L3 [in] | 8.00 |
| E [in] | 9.25 |
| F [in] | 3.75 |

NEMA 184TC Dimensions

| | |
|---------|---|
| L3 [in] | - |
| E [in] | - |
| F [in] | - |

NEMA 213TC Dimensions

| | |
|---------|---|
| L3 [in] | - |
| E [in] | - |
| F [in] | - |