



Excel XEP-06

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your Excel XEP-06 today!

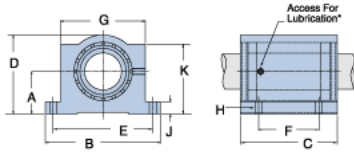

* Lubrication holes for blocks up to 1/2" have flush lube fitting; 5/8" and above are 1/4 - 28 tapped hole with set screw

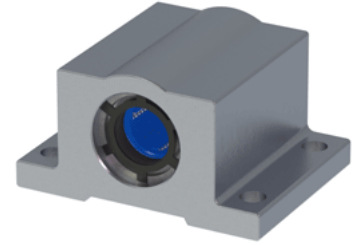

Product Info

| | |
|-----------------------------|--------|
| Nominal Shaft Diameter [in] | 3/8 |
| Part Number | XEP-06 |

Dimensions

| | |
|-----------------|--------|
| A +/-0.001 [in] | 0.500 |
| B [in] | 1 3/4 |
| C [in] | 1 5/16 |
| D [in] | 15/16 |
| E +/-0.005 [in] | 1.437 |
| F +/-0.005 [in] | 0.875 |
| G [in] | 1 1/8 |
| J [in] | 3/16 |
| K [in] | 7/8 |
| H - Bolt | #6 |
| H - Hole [in] | 0.17 |

Weight

| | |
|-------------|------|
| Weight [lb] | 0.12 |
|-------------|------|

Performance Specifications

| | |
|---------------------------|----|
| Dynamic Load Maximum [lb] | 68 |
| Dynamic Load Normal [lb] | 59 |
| Static Load Maximum [lb] | 61 |
| Static Load Normal [lb] | 43 |