



## Excel TEP-08

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your Excel TEP-08 today!



\* Lubrication holes for blocks up to 1/2" have flush lube fitting; 5/8" and above are 1/4 - 28 tapped hole with set screw

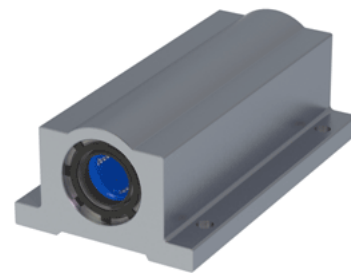

### Product Info

Nominal Shaft Diameter [in]	1/2
Part Number	TEP-08

### Dimensions

A +/-0.001 [in]	0.687
B [in]	2
C [in]	3 1/2
D [in]	1 1/4
E +/-0.005 [in]	1.688
F +/-0.005 [in]	2.500
G [in]	1 3/8
J [in]	1/4
K [in]	1 1/8
H - Bolt	#6
H - Hole [in]	0.17

### Weight

Weight [lb]	0.4
-------------	-----

### Performance Specifications

Dynamic Load Maximum [lb]	350
Dynamic Load Normal [lb]	304
Static Load Maximum [lb]	316
Static Load Normal [lb]	224