



## Excel TEP-10-OPN

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your Excel TEP-10-OPN today!

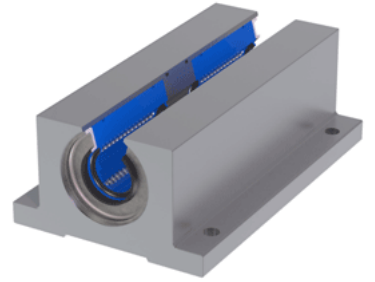

\* Lubrication holes for blocks up to 1/2" have flush lube fitting; 5/8" and above are 1/4 - 28 tapped hole with set screw

### Product Info

|                             |            |
|-----------------------------|------------|
| Nominal Shaft Diameter [in] | 5/8        |
| Part Number                 | TEP-10-OPN |

### Dimensions

|                 |         |
|-----------------|---------|
| A +/-0.001 [in] | 0.875   |
| B [in]          | 2 1/2   |
| C [in]          | 4       |
| D [in]          | 1 11/25 |
| E +/-0.005 [in] | 2.125   |
| F +/-0.005 [in] | 3.000   |
| G [in]          | 1 3/4   |
| J [in]          | 9/32    |
| K [in]          | 3/8     |
| H - Bolt        | #8      |
| H - Hole [in]   | 0.19    |

### Weight

|             |     |
|-------------|-----|
| Weight [lb] | 0.8 |
|-------------|-----|

### Performance Specifications

|                           |     |
|---------------------------|-----|
| Dynamic Load Maximum [lb] | 636 |
| Dynamic Load Normal [lb]  | 630 |
| Static Load Maximum [lb]  | 472 |
| Static Load Normal [lb]   | 458 |