
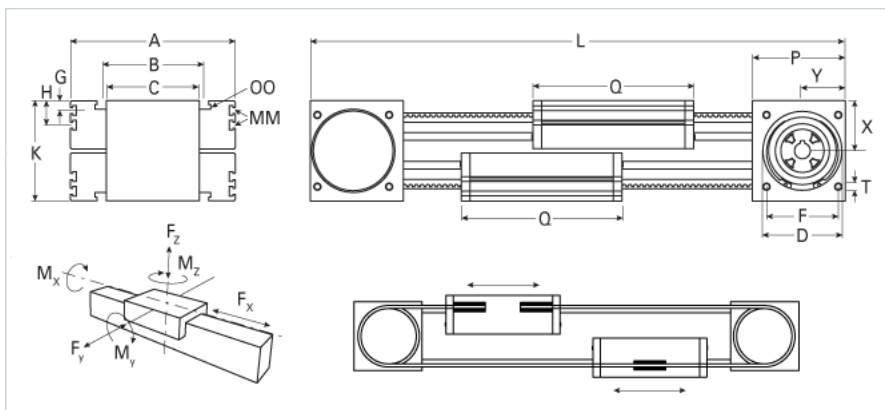


ELZG 80

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ELZG 80 today!

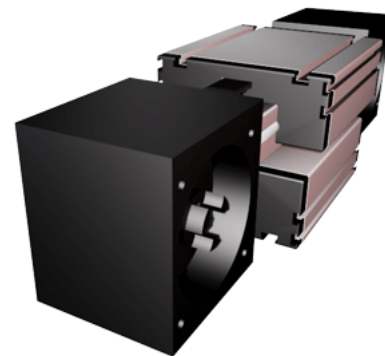

Details	
Size	80
Belt	8M30
mm/Rev	320
Number of Teeth	40
Pully Diameter [mm]	101.9
Dimensions	
Basic Length L [mm]	460
A [mm]	170
B [mm]	117
C [mm]	118
D [mm]	110
F [mm]	100
G [mm]	10
H [mm]	30
K [mm]	140
MM	M6
OO	M10
P [mm]	130
Q [mm]	194
T	M10
X [mm]	70
Y [mm]	60
Shaft Diameter and Length [mm]	22 x 45
Key	6x6x40
Speed	
Speed Maximum [m/s]	6
Forces and Torques	
No-load torque [Nm]	0.9
Tensile force 0.2 sec [N]	2090
Tensile force permanent [N]	1900
Fx dynamic [N]	1800
Fy dynamic [N]	2000
Fz dynamic [N]	1100
Mx dynamic [Nm]	55
My dynamic [Nm]	80
Mz dynamic [Nm]	120
Fx static [N]	1900
Fy static [N]	3000
Fz static [N]	1700
Mx static [Nm]	90
My static [Nm]	110
Mz static [Nm]	150
Geometrical moments of inertia of aluminum profile	
Elastic modulus [N/mm ²]	70000
Ix [mm ⁴]	1899000
Iy [mm ⁴]	1897000
Weight	
Additional Weight per 100 mm [kg]	1.15
Basic Weight [kg]	23.5