
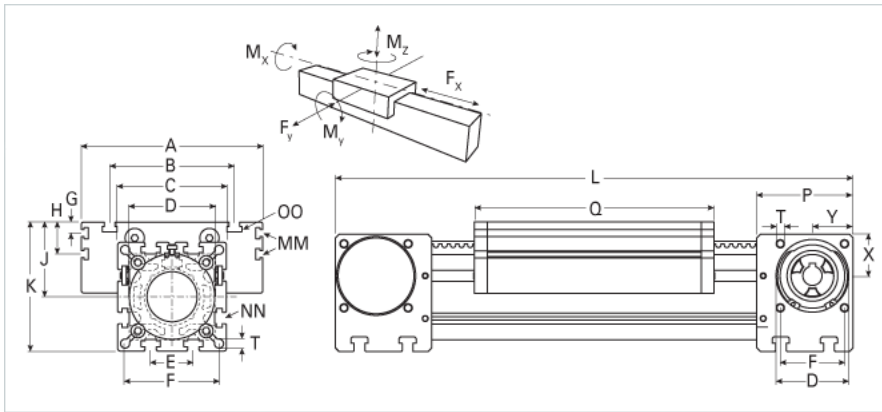


ELVZ 80S

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ELVZ 80S today!

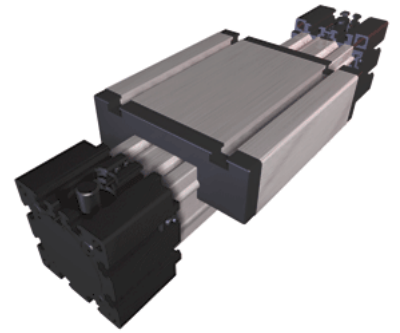

Details

| | |
|---------------------|------|
| Size | 80S |
| Belt | 5M25 |
| mm/Rev | 110 |
| Number of Teeth | 22 |
| Pully Diameter [mm] | 35.0 |

Dimensions

| | |
|--------------------------------|---------|
| Basic Length L [mm] | 395 |
| A [mm] | 190 |
| B [mm] | 126 |
| C [mm] | 102 |
| D [mm] | 80x1 |
| E [mm] | 40 |
| F [mm] | 88 |
| G [mm] | 12.5 |
| H [mm] | 30 |
| J [mm] | 71 |
| K [mm] | 122 |
| MM | M6 |
| NN | M10 |
| OO | M8 |
| P [mm] | 90 |
| Q [mm] | 214 |
| T [mm] | 8.5 |
| U [mm] | 38 |
| V [mm] | 47 |
| W [mm] | 18 |
| X [mm] | 40 |
| Y [mm] | 50 |
| Z | M8 |
| Shaft Diameter and Length [mm] | 18 x 45 |
| Key | 6x6x40 |

Speed

| | |
|---------------------|---|
| Speed Maximum [m/s] | 4 |
|---------------------|---|

Forces and Torques

| | |
|-----------------------------|------|
| No-load torque [Nm] | 1.2 |
| Tensile force 0.2 sec [N] | 1150 |
| Tensile force permanent [N] | 100 |
| Fx dynamic [N] | 840 |
| Fy dynamic [N] | 3600 |
| Fz dynamic [N] | 1800 |
| Mx dynamic [Nm] | 140 |
| My dynamic [Nm] | 230 |
| Mz dynamic [Nm] | 200 |
| Fx static [N] | 1000 |
| Fy static [N] | 4600 |
| Fz static [N] | 3000 |
| Mx static [Nm] | 170 |
| My static [Nm] | 270 |
| Mz static [Nm] | 300 |

Geometrical moments of inertia of aluminum profile

| | |
|--------------------------------------|---------|
| Elastic modulus [N/mm ²] | 70000 |
| Ix [mm ⁴] | 1899000 |

| | |
|-----------------------------------|---------|
| ly [mm ⁴] | 1897000 |
| Weight | |
| Additional Weight per 100 mm [kg] | 1.00 |
| Basic Weight [kg] | 11 |