
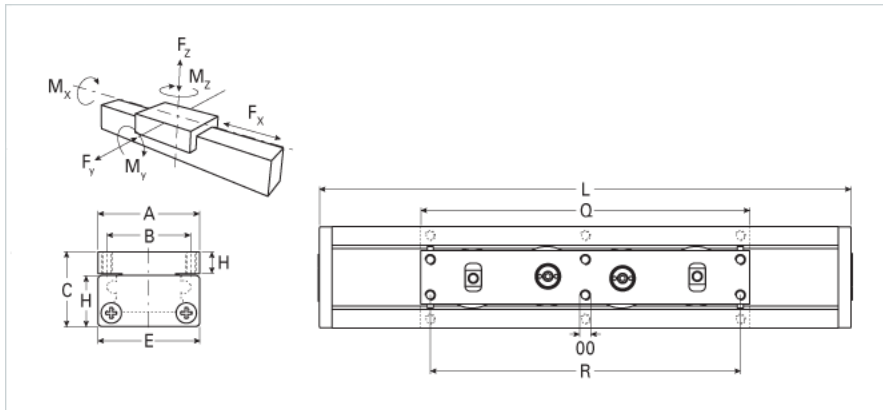


## UL 60

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your UL 60 today!

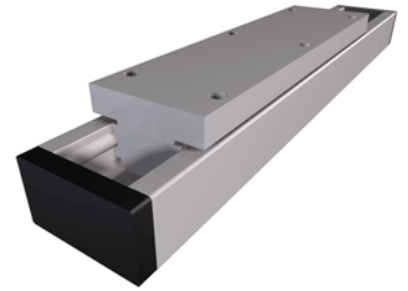

<b>Details</b>	
Size	60
<b>Dimensions</b>	
A [mm]	60
B [mm]	48
C [mm]	43
E [mm]	60
H [mm]	30
Basic Length L [mm]	215
OO	M6x10
P [mm]	8
Q [mm]	194
R [mm]	180
S [mm]	7.5
T [mm]	11.0
<b>Speed</b>	
Speed Maximum [m/s]	5
<b>Forces and Torques</b>	
Fx dynamic [N]	-
Fy dynamic [N]	2000
Fz dynamic [N]	1100
Mx dynamic [N]	43
My dynamic [N]	70
Mz dynamic [N]	100
Fx static [N]	-
Fy static [N]	3000
Fz static [N]	1700
Mx static [N]	67
My static [N]	93
Mz static [N]	120
<b>Geometrical moments of inertia of aluminum profile</b>	
Elastic modulus [N/mm <sup>2</sup> ]	70000
Ix [mm <sup>4</sup> ]	171000
Iy [mm <sup>4</sup> ]	610000
<b>Weight</b>	
Additional Weight per 100 mm [kg]	0.20
Basic Weight [kg]	2.1