
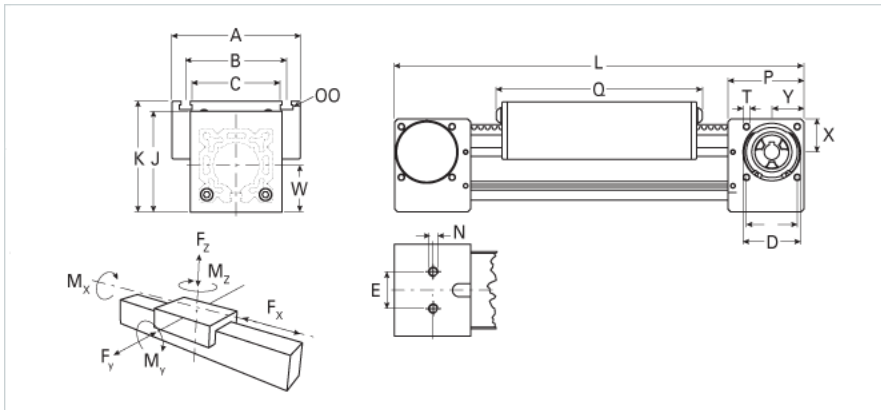


EGZ 30

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your EGZ 30 today!

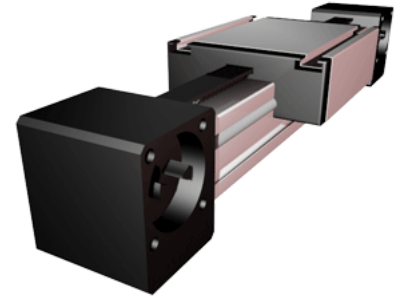

Details	
Size	30
Belt	3M12
MM/REV	75
Number of Teeth	25
Pully Diameter [mm]	23.9
Dimensions	
A [mm]	70
B [mm]	56
Basic Length L [mm]	158
C [mm]	42
D [mm]	28
E [mm]	13
F [mm]	25
H [mm]	-
J [mm]	44
K [mm]	47
MM	-
N	M5
OO	M6
P [mm]	36
Q [mm]	82
T	M4
U [mm]	-
V [mm]	-
W [mm]	21
X [mm]	16
Y [mm]	16
Shaft Key [mm]	2x2x12
Shaft Diameter h6 x Length [mm]	6 x 15
Shaft Diameter and Length [mm]	6 x 15
Key	2x2x12
Speed	
Speed Maximum [m/s]	2
Forces and Torques	
No Load Torque [Nm]	0.2
Tensile force 0.2 sec [N]	280
Tensile force permanent [N]	200
F _x dynamic [N]	180
F _y dynamic [N]	60
F _z dynamic [N]	60
M _x dynamic [Nm]	5
M _y dynamic [Nm]	6
M _z dynamic [Nm]	7
F _x static [N]	200
F _y static [N]	90
F _z static [N]	90
M _x static [Nm]	10
M _y static [Nm]	13
M _z static [Nm]	14
Geometrical moments of inertia of aluminum profile	
Elastic modulus [N/mm ²]	70000
I _x [mm ⁴]	40900

ly [mm ⁴]	40000
Weight	
Additional Weight per 100 mm [kg]	0.13
Basic Weight [kg]	0.8