


NH65TA

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH65TA today!

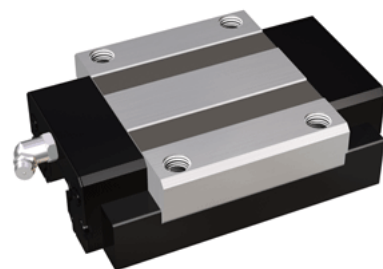

| Details | |
|----------------------------------|----------|
| Size [mm] | 65 |
| Dimensions | |
| L1 [mm] | 225 |
| L2 [mm] | 148 |
| L3 [mm] | 110 |
| L4 [mm] | 16 |
| M1 x l | M16X29 |
| H3 [mm] | 20 |
| W1 [mm] | 170 |
| W2 [mm] | 142 |
| W3 [mm] | 14 |
| W5 [mm] | 162 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 141.11 |
| Basic Load Ratings C [lbf] | 31714 |
| Basic Load Ratings C0 [kN] | 215.15 |
| Basic Load Ratings C0 [lbf] | 48354 |
| Static Moment Ratings-Ma [kN-m] | 4.21 |
| Static Moment Ratings-Ma [lb-in] | 37237 |
| Static Moment Ratings-Mb [kN-m] | 4.21 |
| Static Moment Ratings-Mb [lb-in] | 37237 |
| Static Moment Ratings-Mc [kN-m] | 7.38 |
| Static Moment Ratings-Mc [lb-in] | 65360 |
| Weight | |
| Weight-Block [kg] | 8.4 |
| Grease Fitting | |
| Grease Fitting Part Number | B-PT 1/8 |