


NU25SER

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NU25SER today!

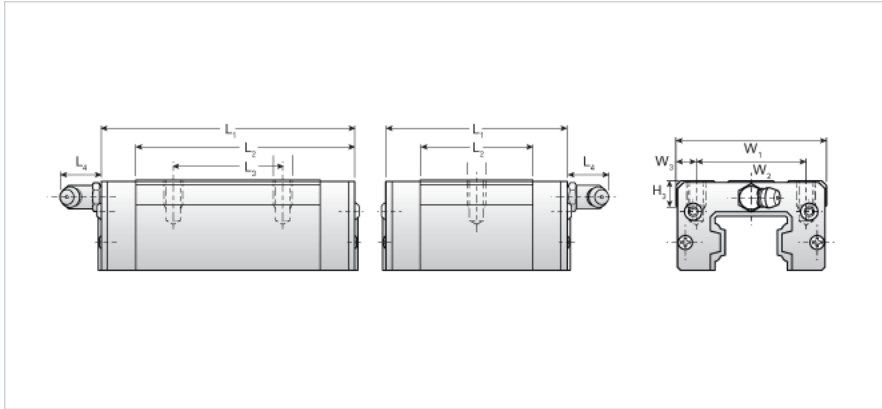

| Details | |
|----------------------------------|-------|
| Size [mm] | 25 |
| Dimensions | |
| L1 [mm] | 60 |
| L2 [mm] | 36 |
| L4 [mm] | 12 |
| M1 x l | M6X8 |
| H3 [mm] | 8 |
| W1 [mm] | 48 |
| W2 [mm] | 35 |
| W3 [mm] | 6.5 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 13.14 |
| Basic Load Ratings C [lbf] | 2953 |
| Basic Load Ratings C0 [kN] | 18.63 |
| Basic Load Ratings C0 [lbf] | 4187 |
| Static Moment Ratings-Ma [kN-m] | 0.09 |
| Static Moment Ratings-Ma [lb-in] | 781 |
| Static Moment Ratings-Mb [kN-m] | 0.09 |
| Static Moment Ratings-Mb [lb-in] | 781 |
| Static Moment Ratings-Mc [kN-m] | 0.23 |
| Static Moment Ratings-Mc [lb-in] | 1996 |
| Weight | |
| Weight-Block [kg] | 0.25 |
| Grease Fitting | |
| Grease Fitting Part Number | B-M6F |