


**ActionJac 2.5HL-BSJ-DC 6:1**

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your ActionJac 2.5HL-BSJ-DC 6:1 today!

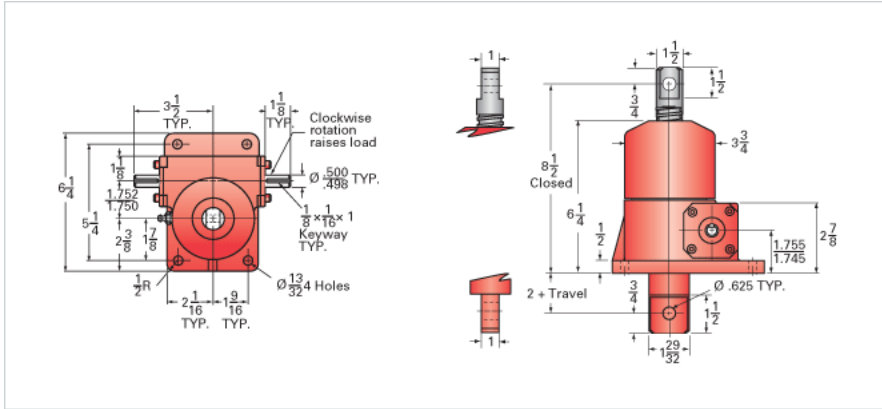

**Details**

Capacity [Ton]	2.5
Gear Ratio	6:1
Turns of Worm per Inch Travel	6
Torque to Raise 1 lb. [in-lb]	0.0404
Torque to Raise 1 lb. Keyed [in-lb]	0.0444
Lifting Screw Diameter [in]	1.00
Screw Lead [in]	1.000
Root Diameter [in]	0.820
BackDrive Holding Torque [ft-lb]	14.0
Tare Drag Torque [in-lb]	5

**Performance Specifications**

Maximum Allowable Input [hp]	2.00
Maximum Input Torque [in-lb]	202
Maximum Worm Speed at Rated Load Non-keyed [rpm]	624
Maximum Worm Speed at Rated Load Keyed [rpm]	567
Maximum Load at 1750 RPM Non-keyed [lb]	1783
Maximum Load at 1750 RPM Keyed [lb]	1620
Starting Torque	1.5 x Running Torque

**Weight**

Base 0 Travel [lb]	17
Per Inch of Travel [lb]	0.60
Grease [lb]	0.5