


ActionJac 20-BSJ-IK 24:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 20-BSJ-IK 24:1 today!

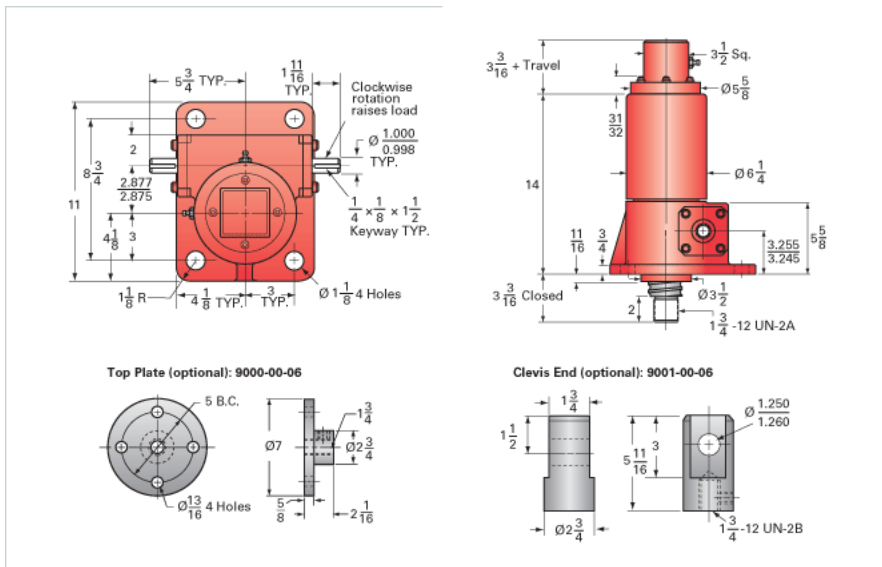

Details

| | |
|----------------------------------|--------|
| Capacity [Ton] | 20 |
| Gear Ratio | 24:1 |
| Turns of Worm per Inch Travel | 48 |
| Torque to Raise 1 lb. [in-lb] | 0.0087 |
| Lifting Screw Diameter [in] | 2.25 |
| Screw Lead [in] | 0.500 |
| Root Diameter [in] | 1.850 |
| BackDrive Holding Torque [ft-lb] | 7.0 |
| Tare Drag Torque [in-lb] | 40 |

Performance Specifications

| | |
|--|----------------------|
| Maximum Allowable Input [hp] | 2.50 |
| Maximum Input Torque [in-lb] | 314 |
| Maximum Worm Speed at Rated Load [rpm] | 453 |
| Maximum Load at 1750 RPM [lb] | 10349 |
| Starting Torque | 1.5 x Running Torque |

Weight

| | |
|-------------------------|------|
| Base 0 Travel [lb] | 85 |
| Per Inch of Travel [lb] | 1.50 |
| Grease [lb] | 2.2 |