





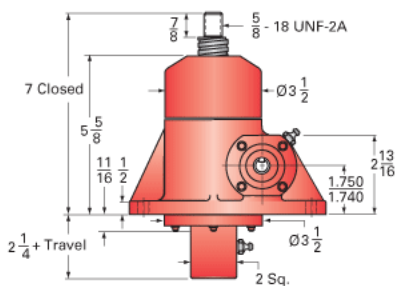

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 2R-BSJ-UK 6:1 today!

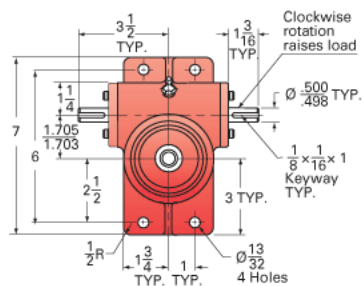

| | |
|----------------------------------|--------|
| Capacity [Ton] | 2 |
| Gear Ratio | 6:1 |
| Turns of Worm per Inch Travel | 24 |
| Torque to Raise 1 lb. [in-lb] | 0.0110 |
| Lifting Screw Diameter [in] | 1.00 |
| Screw Lead [in] | 0.250 |
| Root Diameter [in] | 0.820 |
| BackDrive Holding Torque [ft-lb] | 3 |
| Tare Drag Torque [in-lb] | 4 |

| | |
|--|----------------------|
| Maximum Allowable Input [hp] | 2.00 |
| Maximum Input Torque [in-lb] | 40 |
| Maximum Worm Speed at Rated Load [rpm] | 1636 |
| Maximum Load at 1750 RPM [lb] | 3740 |
| Starting Torque | 1.5 x Running Torque |

| | |
|-------------------------|------|
| Base 0 Travel [lb] | 18 |
| Per Inch of Travel [lb] | 0.60 |
| Grease [lb] | 0.5 |