


## ActionJac 2.5-BSJ-UK 6:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 2.5-BSJ-UK 6:1 today!





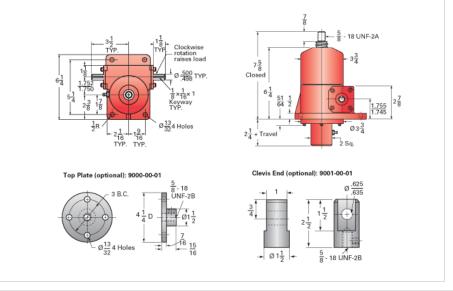

| Details                                |                      |
|--|----------------------|
| Capacity [Ton]                         | 2.5                  |
| Gear Ratio                             | 6:1                  |
| Turns of Worm per Inch Travel          | 24                   |
| Torque to Raise 1 lb. [in-lb]          | 0.0112               |
| Lifting Screw Diameter [in]            | 1.00                 |
| Screw Lead [in]                        | 0.250                |
| Root Diameter [in]                     | 0.820                |
| BackDrive Holding Torque [ft-lb]       | 4                    |
| Tare Drag Torque [in-lb]               | 5                    |
| Performance Specifications             |                      |
| Maximum Allowable Input [hp]           | 2.00                 |
| Maximum Input Torque [in-lb]           | 51                   |
| Maximum Worm Speed at Rated Load [rpm] | 1636                 |
| Maximum Load at 1750 RPM [lb]          | 4674                 |
| Starting Torque                        | 1.5 x Running Torque |
| Weight                                 |                      |
| Base 0 Travel [lb]                     | 17                   |
| Per Inch of Travel [lb]                | 0.60                 |
| Grease [lb]                            | 0.5                  |