# ActionJac 2R-MSJ-DC 6:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 2R-MSJ-DC 6:1 today!

2D/3D CAD ONLINE




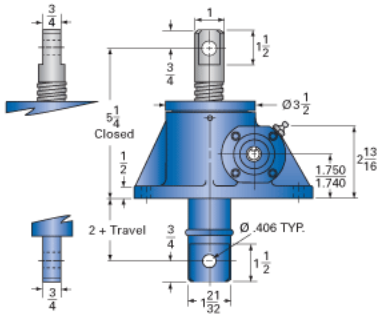


| | |
|---|---|
| **Details** | |
| Capacity [Ton] | 2 |
| Gear Ratio | 6:1 |
| Turns of Worm per Inch Travel | 24 |
| Torque to Raise 1 lb. [in-lb] | 0.0250 |
| Torque to Raise 1 lb. Keyed [in-lb] | 0.0288 |
| Lifting Screw Diameter [in] | 1.00 |
| Screw Lead [in] | 0.250 |
| Root Diameter [in] | 0.698 |
| Tare Drag Torque [in-lb] | 4 |
| **Performance Specifications** | |
| Maximum Allowable Input [hp] | 2.00 |
| Maximum Input Torque [in-lb] | 100 |
| Maximum Worm Speed at Rated Load Non-keyed [rpm] | 1260 |
| Maximum Worm Speed at Rated Load Keyed [rpm] | 1096 |
| Maximum Load at 1750 RPM Non-keyed [lb] | 2881 |
| Maximum Load at 1750 RPM Keyed [lb] | 2505 |
| Starting Torque | 2 x Running Torque |
| **Weight** | |
| Base 0 Travel [lb] | 15 |
| Per Inch of Travel [lb] | 0.45 |
| Grease [lb] | 0.5 |