ActionJac 10-MSJ-DC 24:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 10-MSJ-DC 24:1 today!

2D/3D CAD ONLINE

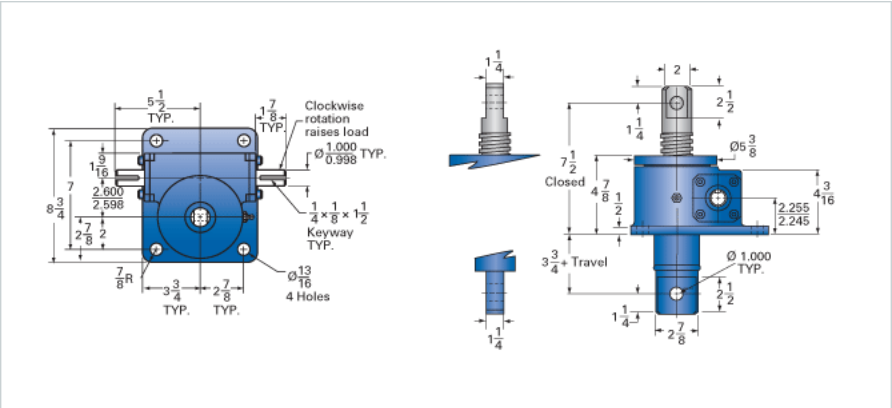

Details	
Capacity [Ton]	10
Gear Ratio	24:1
Turns of Worm per Inch Travel	48
Torque to Raise 1 lb. [in-lb]	0.0192
Torque to Raise 1 lb. Keyed [in-lb]	0.0221
Lifting Screw Diameter [in]	2.00
Screw Lead [in]	0.500
Root Diameter [in]	1.410
Tare Drag Torque [in-lb]	20
Performance Specifications	
Maximum Allowable Input [hp]	1.50
Maximum Input Torque [in-lb]	384
Maximum Worm Speed at Rated Load Non-keyed [rpm]	246
Maximum Worm Speed at Rated Load Keyed [rpm]	214
Maximum Load at 1750 RPM Non-keyed [lb]	2813
Maximum Load at 1750 RPM Keyed [lb]	2444
Starting Torque	2 x Running Torque
Weight	
Base 0 Travel [lb]	45
Per Inch of Travel [lb]	1.20
Grease [lb]	1.5