# ActionJac 35AB-MSJ-I 32:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 35AB-MSJ-I 32:1 today!

2D/3D CAD ONLINE

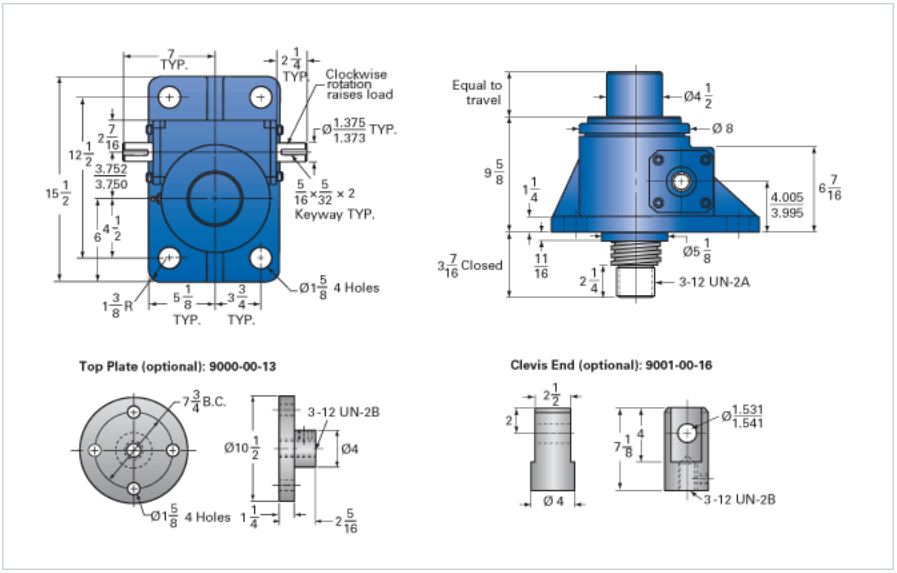


| | |
|---|---|
| **Details** | |
| Capacity [Ton] | 35 |
| Gear Ratio | 32:1 |
| Turns of Worm per Inch Travel | 48 |
| Torque to Raise 1 lb. [in-lb] | 0.0257 |
| Lifting Screw Diameter [in] | 3.75 |
| Screw Lead [in] | 0.667 |
| Root Diameter [in] | 3.009 |
| Tare Drag Torque [in-lb] | 50 |
| **Performance Specifications** | |
| Maximum Allowable Input [hp] | 3.50 |
| Maximum Input Torque [in-lb] | 1800 |
| Maximum Worm Speed at Rated Load [rpm] | 122 |
| Maximum Load at 1750 RPM [lb] | 4904 |
| Starting Torque | 2 x Running Torque |
| **Weight** | |
| Base 0 Travel [lb] | 145 |
| Per Inch of Travel [lb] | 3.40 |
| Grease [lb] | 3.5 |