Product Specification Sheet

ActionJac 50AB-MSJ-U 32:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 50AB-MSJ-U 32:1 today!

2D/3D CAD ONLINE

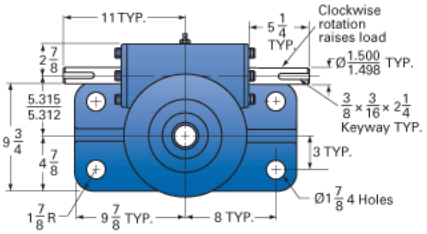



Top Plate (optional): 9000-00-09

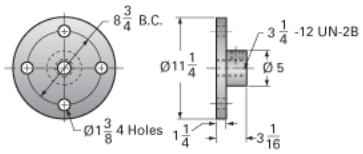

Clevis End (optional): 9001-00-09



Details	
Capacity [Ton]	50
Gear Ratio	32:1
Turns of Worm per Inch Travel	48
Torque to Raise 1 lb. [in-lb]	0.0301
Lifting Screw Diameter [in]	4.50
Screw Lead [in]	0.667
Root Diameter [in]	3.782
Tare Drag Torque [in-lb]	100
Performance Specifications	
Maximum Allowable Input [hp]	5.00
Maximum Input Torque [in-lb]	3014
Maximum Worm Speed at Rated Load [rpm]	104
Maximum Load at 1750 RPM [lb]	5982
Starting Torque	2 x Running Torque
Weight	
Base 0 Travel [lb]	280
Per Inch of Travel [lb]	5.00
Grease [lb]	5.8