


## ActionJac EM20-BSJ-IR 24:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac EM20-BSJ-IR 24:1 today!





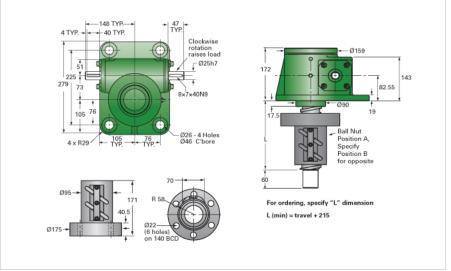

| Details                                |                      |
|----------------------------------------|----------------------|
| Capacity [kN]                          | 200                  |
| Gear Ratio                             | 24:1                 |
| Travel for 1 Turn of Worm [mm]         | 0.50                 |
| Torque to Raise 1 kN [Nm]              | 0.19                 |
| No Load Torque [Nm]                    | 4.52                 |
| Lifting Screw Diameter [mm]            | 63                   |
| Screw Lead [mm]                        | 12                   |
| Root Diameter [mm]                     | 57.0                 |
| BackDrive Holding Torque [Nm]          | 31.0                 |
| Performance Specifications             |                      |
| Maximum Allowable Input [kW]           | 1.90                 |
| Maximum Input Torque [Nm]              | 37.70                |
| Maximum Load at 1425 RPM [kN]          | 66.1                 |
| Maximum Worm Speed at Rated Load [rpm] | 410                  |
| Starting Torque                        | 1.5 x Running Torque |
| Weight                                 |                      |
| Base 0 Travel [kg]                     | 38.60                |
| Per 100mm of Travel [kg]               | 2.31                 |
| Grease [kg]                            | 1.00                 |