


ActionJac EM5-BSJ-UR 6:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac EM5-BSJ-UR 6:1 today!

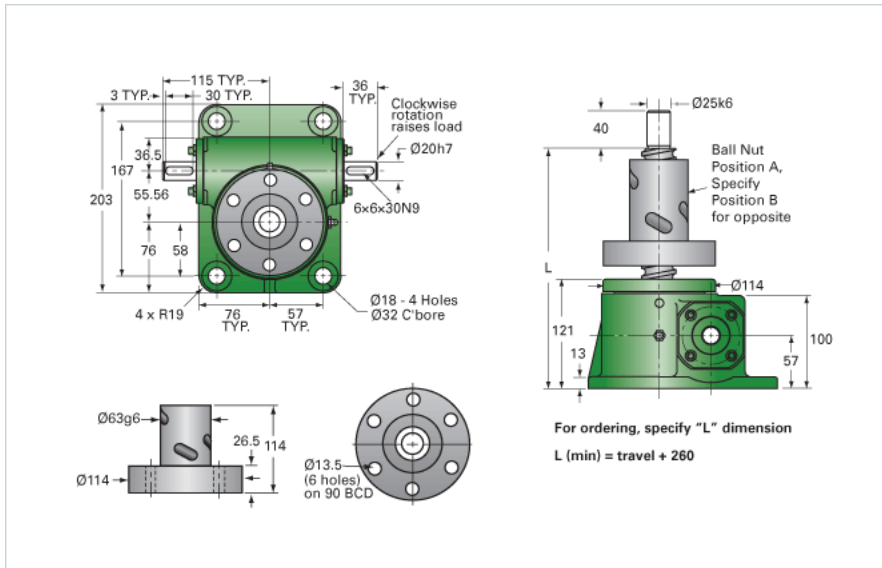

Details

| | |
|---------------------------------|------|
| Capacity [kN] | 50 |
| Gear Ratio | 6:1 |
| Raise for One Turn of Worm [mm] | 1.67 |
| Torque to Raise 1 kN [Nm] | 0.39 |
| No Load Torque [Nm] | 1.13 |
| Lifting Screw Diameter [mm] | 40 |
| Screw Lead [mm] | 10 |
| Root Diameter [mm] | 34.8 |
| BackDrive Holding Torque [Nm] | 16.0 |

Performance Specifications

| | |
|--|----------------------|
| Maximum Allowable Input [kW] | 2.28 |
| Maximum Input Torque [Nm] | 19.30 |
| Maximum Load at 1425 RPM [kN] | 39.4 |
| Maximum Worm Speed at Rated Load [rpm] | 1125 |
| Starting Torque | 1.5 x Running Torque |

Weight

| | |
|--------------------------|-------|
| Base 0 Travel [kg] | 15.90 |
| Per 100mm of Travel [kg] | 0.93 |
| Grease [kg] | 0.45 |