
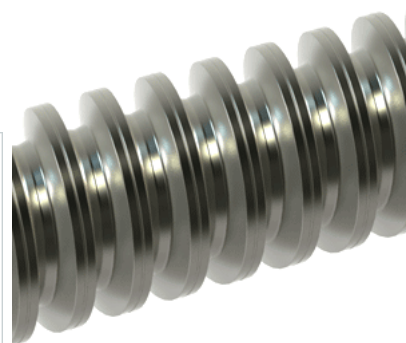


## PowerAC 3/4"-6 LS

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 3/4"-6 LS today!

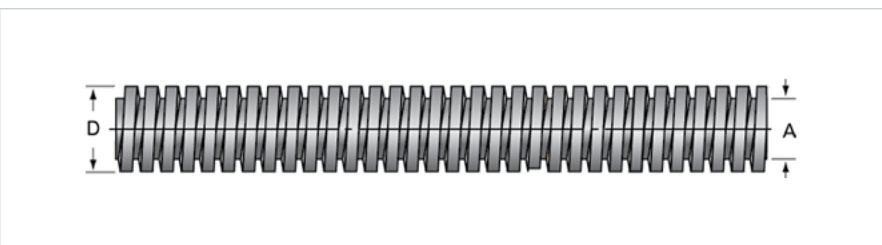

|   |                      |
|---|----------------------|
| <b>Product Info</b>   |                      |
| Screw Code  | 076-LS               |
| Thread Direction  | LH                   |
| Screw Material  | 300 Series Stainless |
| <b>Details</b>  |                      |
| Lead [in]   | 0.166                |
| Starts  | 1                    |
| Pitch [in]  | 0.166                |
| Turns Per Inch  | 6                    |
| Threads per Inch  | 6                    |
| Thread Code   | 076                  |
| Form  | 2C                   |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 12                   |
| End Code for Type 4 [* Journals may show tracings of the thread]        | 8                    |
| <b>Dimensions</b>   |                      |
| A - Root Diameter Minimum [in]  | 0.537                |
| D - Nominal Rod Diameter [in]   | 0.750                |
| <b>Part Numbers</b>   |                      |
| 3 ft. Part Number   | 94076                |
| 6 ft. Part Number   | 95076                |
| 12 ft. Part Number  | 96076                |
| 20 ft. Part Number  |                      |
| <b>Performance Specifications</b>                                       |                      |
| Lead Accuracy +/- [in/in]   | 0.0003               |
| <b>Weight</b>   |                      |
| Screw Weight [lb./ft.]  | 1.17                 |