


PowerAC 1 1/4"-4 LS

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerAC 1 1/4"-4 LS today!

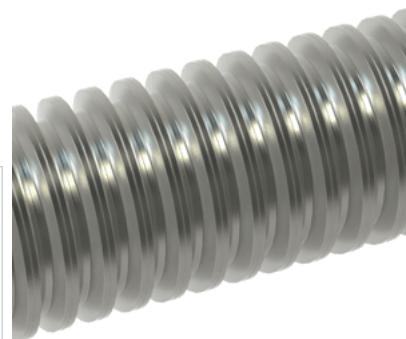

Product Info

| | |
|------------------|----------------------|
| Screw Code | 124-LS |
| Thread Direction | LH |
| Screw Material | 300 Series Stainless |

Details

| | |
|---|-------|
| Lead [in] | 0.250 |
| Starts | 1 |
| Pitch [in] | 0.250 |
| Turns Per Inch | 4 |
| Threads per Inch | 4 |
| Thread Code | 124 |
| Form | 2C |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 20 |
| End Code for Type 4 [* Journals may show tracings of the thread] | 12 |

Dimensions

| | |
|--------------------------------|-------|
| A - Root Diameter Minimum [in] | 0.947 |
| D - Nominal Rod Diameter [in] | 1.250 |

Part Numbers

| | |
|--------------------|-------|
| 3 ft. Part Number | 94124 |
| 6 ft. Part Number | 95124 |
| 12 ft. Part Number | 96124 |
| 20 ft. Part Number | |

Performance Specifications

| | |
|---------------------------|--------|
| Lead Accuracy +/- [in/in] | 0.0003 |
|---------------------------|--------|

Weight

| | |
|------------------------|------|
| Screw Weight [lb./ft.] | 3.34 |
|------------------------|------|