


## PowerAC 3/4"-10 TA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 3/4"-10 TA today!

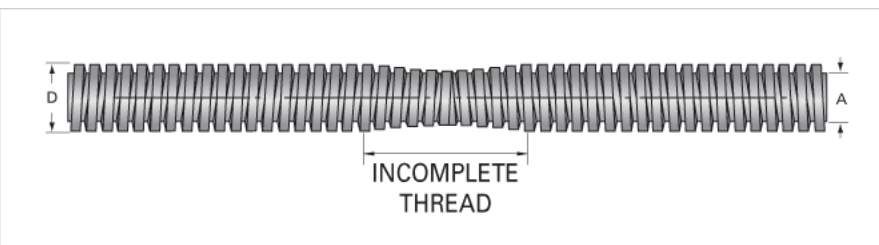

<b>Product Info</b>	
Screw Code	070 TA
Screw Direction	RH/LH
Screw Material	4140 Series
<b>Details</b>	
Lead [in]	0.166
Starts	1
Pitch [in]	0.166
Turns Per Inch	10
Threads per Inch	6
Thread Code	086
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	15
End Code for Type 4 [* Journals may show tracings of the thread]	8
<b>Dimensions</b>	
A - Root Diameter Minimum [in]	0.608
D - Nominal Rod Diameter [in]	0.750
Incomplete Overlapping Thread Length [in]	2.00
Maximum Overall Length [in]	72
Maximum Useable LH & RH Thread [in]	35.00
<b>Weight</b>	
Weight Per Foot [lb]	1.65
<b>Part Numbers</b>	
36" Part Number	TL3/4-10RS 36
72" Part Number	TL3/4-10RS 72
144" Part Number	
<b>Performance Specifications</b>	
Lead Accuracy +/- [in/in]	0.0003