


PowerAC 1"-5 TA

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerAC 1"-5 TA today!

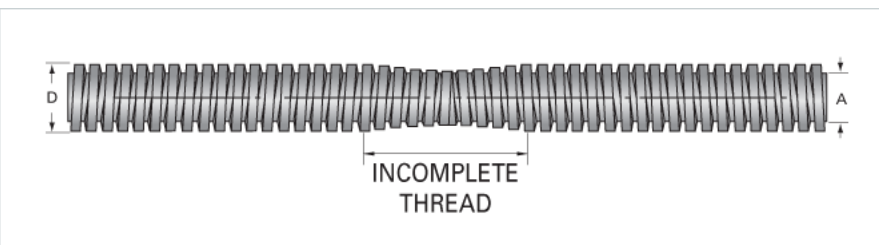

| | |
|---|-------------|
| Product Info | |
| Screw Code | 105 TA |
| Screw Direction | RH/LH |
| Screw Material | 4140 Series |
| Details | |
| Lead [in] | 0.200 |
| Starts | 1 |
| Pitch [in] | 0.200 |
| Turns Per Inch | 5 |
| Threads per Inch | 5 |
| Thread Code | 105 |
| Form | 2C |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 17 |
| End Code for Type 4 [* Journals may show tracings of the thread] | 10 |
| Dimensions | |
| A - Root Diameter Minimum [in] | 0.750 |
| D - Nominal Rod Diameter [in] | 1.000 |
| Incomplete Overlapping Thread Length [in] | 2.50 |
| Maximum Overall Length [in] | 72 |
| Maximum Useable LH & RH Thread [in] | 34.75 |
| Weight | |
| Weight Per Foot [lb] | 2.16 |
| Part Numbers | |
| 36" Part Number | TL1-5RS 36 |
| 72" Part Number | TL1-5RS 72 |
| 144" Part Number | |
| Performance Specifications | |
| Lead Accuracy +/- [in/in] | 0.0003 |