


## PowerAC 1 1/4"-5 TA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1 1/4"-5 TA today!

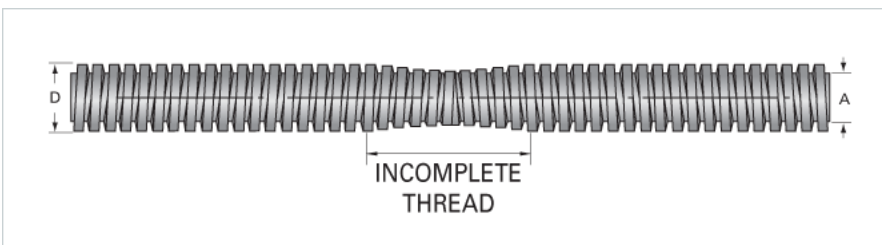

<b>Product Info</b>	
Screw Code	125 TA
Screw Direction	RH/LH
Screw Material	4140 Series
<b>Details</b>	
Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Threads per Inch	5
Thread Code	125
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	25
End Code for Type 4 [* Journals may show tracings of the thread]	16
<b>Dimensions</b>	
A - Root Diameter Minimum [in]	0.999
D - Nominal Rod Diameter [in]	1.250
Incomplete Overlapping Thread Length [in]	2.50
Maximum Overall Length [in]	144
Maximum Useable LH & RH Thread [in]	70.75
<b>Weight</b>	
Weight Per Foot [lb]	3.49
<b>Part Numbers</b>	
36" Part Number	
72" Part Number	
144" Part Number	TL1-1/4-5RS 144
<b>Performance Specifications</b>	
Lead Accuracy +/- [in/in]	0.0003