


PowerTrac SBN 2250 - 0500 RH, Double Circuit, Safety Thread

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac SBN 2250 - 0500 RH, Double Circuit, Safety

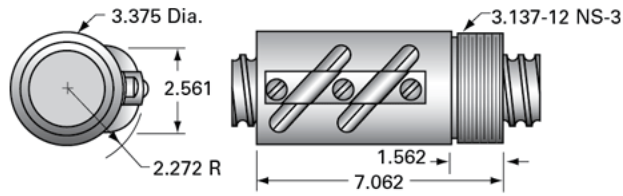

Product Info

| | |
|------------------|----------|
| Ball Nut Number | SBN10629 |
| Thread Direction | RH |

Details

| | |
|----------------------------|-------|
| Ball Circle Diameter [in] | 2.250 |
| Lead [in] | 0.500 |
| Nominal Ball Diameter [in] | 0.375 |
| Root diameter [in] | 1.850 |

Dimensions

| | |
|--------|-------|
| A [in] | 7.062 |
|--------|-------|

Forces and Torques

| | |
|-------------------------------|-------|
| Torque to Raise 1 lb. [in-lb] | 0.088 |
|-------------------------------|-------|

Flange Part Numbers

| | |
|--------------------|---------|
| Flange Part Number | FLG7574 |
|--------------------|---------|

Wiper Part Numbers

| | |
|----------------------------|---------|
| Wiper Kit Part Number | WKF3890 |
| Wiper Kit Felt Part Number | |

Weight

| | |
|-----------------|------|
| Nut Weight [lb] | 9.00 |
|-----------------|------|

Performance Specifications

| | |
|-----------------------------------------|--------|
| Lead Accuracy +/- [in./ft.] | 0.004 |
| Maximum Adjustable Preload [lb] | |
| Spring Rate x 10 ⁶ [lb./in.] | |
| Dynamic Load [lb] | 21306 |
| Static Load [lb] | 142660 |