


PowerTrac SEL 0631 - 0200 RH, Adjustable Preloaded

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac SEL 0631 - 0200 RH, Adjustable Preloaded

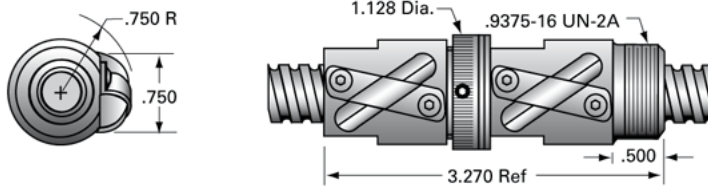

Product Info

| | |
|------------------|----------|
| Ball Nut Number | SEL10408 |
| Thread Direction | RH |

Details

| | |
|----------------------------|-------|
| Ball Circle Diameter [in] | 0.631 |
| Lead [in] | 0.200 |
| Nominal Ball Diameter [in] | 0.125 |
| Root diameter [in] | 0.500 |

Forces and Torques

| | |
|-------------------------------|-------|
| Torque to Raise 1 lb. [in-lb] | 0.035 |
|-------------------------------|-------|

Flange Part Numbers

| | |
|--------------------|---------|
| Flange Part Number | FLG7570 |
|--------------------|---------|

Wiper Part Numbers

| | |
|-----------------------|----------|
| Wiper Kit Part Number | WKB10407 |
|-----------------------|----------|

Weight

| | |
|-----------------|------|
| Nut Weight [lb] | 0.65 |
|-----------------|------|

Performance Specifications

| | |
|---|-------|
| Lead Accuracy +/- [in./ft.] | 0.004 |
| Maximum Adjustable Preload [lb] | 233 |
| Spring Rate x 10 ⁶ [lb./in.] | |
| Dynamic Load [lb] | 815 |
| Static Load [lb] | 6384 |