


## PowerTrac SEL 0631 - 0200 LH, Adjustable Preloaded

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerTrac SEL 0631 - 0200 LH, Adjustable Preloaded

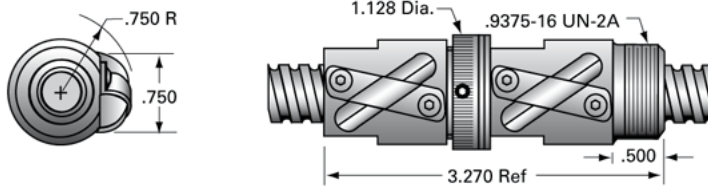

### Product Info

|                  |          |
|------------------|----------|
| Ball Nut Number  | SEL10410 |
| Thread Direction | LH       |

### Details

|                            |       |
|----------------------------|-------|
| Ball Circle Diameter [in]  | 0.631 |
| Lead [in]                  | 0.200 |
| Nominal Ball Diameter [in] | 0.125 |
| Root diameter [in]         | 0.500 |

### Forces and Torques

|                               |       |
|-------------------------------|-------|
| Torque to Raise 1 lb. [in-lb] | 0.035 |
|-------------------------------|-------|

### Flange Part Numbers

|                    |         |
|--------------------|---------|
| Flange Part Number | FLG7570 |
|--------------------|---------|

### Wiper Part Numbers

|                       |          |
|-----------------------|----------|
| Wiper Kit Part Number | WKB10407 |
|-----------------------|----------|

### Weight

|                 |      |
|-----------------|------|
| Nut Weight [lb] | 0.65 |
|-----------------|------|

### Performance Specifications

|   |       |
|---|-------|
| Lead Accuracy +/- [in./ft.]             | 0.004 |
| Maximum Adjustable Preload [lb]         | 233   |
| Spring Rate x 10 <sup>6</sup> [lb./in.] |       |
| Dynamic Load [lb]                       | 815   |
| Static Load [lb]                        | 6384  |