


PowerTrac SEL 1000 - 1000 RH, Adjustable Preloaded

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac SEL 1000 - 1000 RH, Adjustable Preloaded

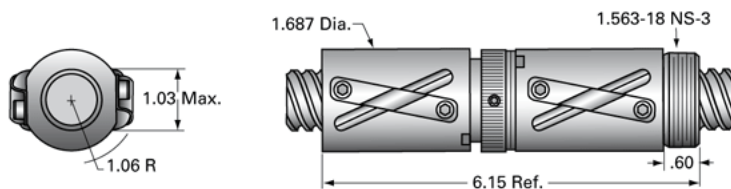

Product Info

| | |
|------------------|----------|
| Ball Nut Number | SEL10462 |
| Thread Direction | RH |

Details

| | |
|----------------------------|-------|
| Ball Circle Diameter [in] | 1.000 |
| Lead [in] | 1.000 |
| Nominal Ball Diameter [in] | 0.156 |
| Root diameter [in] | 0.820 |

Forces and Torques

| | |
|-------------------------------|-------|
| Torque to Raise 1 lb. [in-lb] | 0.177 |
|-------------------------------|-------|

Flange Part Numbers

| | |
|--------------------|---------|
| Flange Part Number | FLG7571 |
|--------------------|---------|

Wiper Part Numbers

| | |
|-----------------------|---------|
| Wiper Kit Part Number | WKB2650 |
|-----------------------|---------|

Weight

| | |
|-----------------|------|
| Nut Weight [lb] | 2.50 |
|-----------------|------|

Performance Specifications

| | |
|---|-------|
| Lead Accuracy +/- [in./ft.] | 0.004 |
| Maximum Adjustable Preload [lb] | 300 |
| Spring Rate x 10 ⁶ [lb./in.] | |
| Dynamic Load [lb] | 2142 |
| Static Load [lb] | 11925 |