


PowerTrac SEL 1500 - 0250 RH, Adjustable Preloaded

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac SEL 1500 - 0250 RH, Adjustable Preloaded

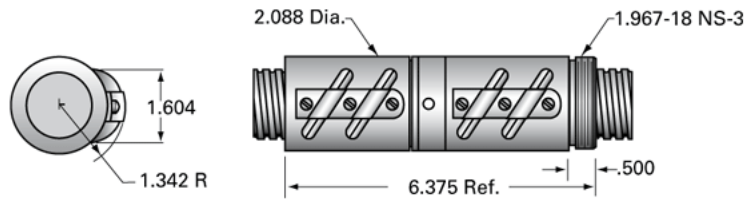

Product Info

| | |
|------------------|---------|
| Ball Nut Number | SEL4271 |
| Thread Direction | RH |

Details

| | |
|----------------------------|-------|
| Ball Circle Diameter [in] | 1.500 |
| Lead [in] | 0.250 |
| Nominal Ball Diameter [in] | 0.156 |
| Root diameter [in] | 1.320 |

Forces and Torques

| | |
|-------------------------------|-------|
| Torque to Raise 1 lb. [in-lb] | 0.044 |
|-------------------------------|-------|

Flange Part Numbers

| | |
|--------------------|---------|
| Flange Part Number | FLG6754 |
|--------------------|---------|

Wiper Part Numbers

| | |
|-----------------------|---------|
| Wiper Kit Part Number | WKB2654 |
|-----------------------|---------|

Weight

| | |
|-----------------|------|
| Nut Weight [lb] | 3.00 |
|-----------------|------|

Performance Specifications

| | |
|---|-------|
| Lead Accuracy +/- [in./ft.] | 0.004 |
| Maximum Adjustable Preload [lb] | 920 |
| Spring Rate x 10 ⁶ [lb./in.] | |
| Dynamic Load [lb] | 4198 |
| Static Load [lb] | 44030 |