


## PowerAC 1 3/4"-4 LA w/Bronze Nut

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1 3/4"-4 LA w/Bronze Nut today!

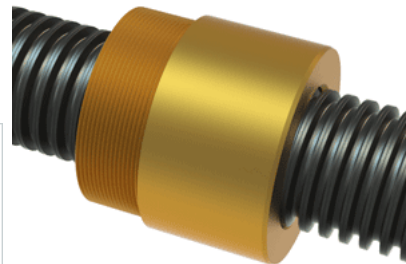

### Rolled Inch Acme Screw

#### Product Info

Screw Code	174-LA
Thread Direction	LH
Screw Material	4140 Series

#### Details

Lead [in]	0.250
Starts	1
Pitch [in]	0.250
Turns Per Inch	4
Threads per Inch	4
Thread Code	174
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	35
End Code for Type 4 [* Journals may show tracings of the thread]	19

#### Dimensions

A - Root Diameter Minimum [in]	1.427
D - Nominal Rod Diameter [in]	1.750

#### Part Numbers

3 ft. Part Number	51174
6 ft. Part Number	52174
12 ft. Part Number	53174
20 ft. Part Number	

#### Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

#### Weight

Screw Weight [lb./ft.]	6.97
------------------------	------

### Inch Acme Nut with Optional Flange

#### Product Info

Part Number	80174
Thread Direction	LH
Type	Bronze

#### Details

Lead [in]	0.250
Starts	1
Pitch [in]	0.250
Turns Per Inch	4
Lash (Maximum Axial) [in]	0.011
Nominal Rod Diameter [in]	1.750
Threads per Inch	4
Thread Code	174
Form	2C

#### Dimensions

B [in]	2.50
C [in]	2.75
E [in]	0.88
F (n) Dia. [in]	(4) .531
F BCD [in]	4.062
G [in]	0.90
H [in]	4.94
J [in]	2.548-18

#### Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.153
-------------------------------	-------

#### Flange Part Numbers

Flange No-Lash Part Number	73500
Flange Part Number	FLG7573

#### Weight

Flange Weight [lb]	4.73
Nut Weight [lb]	3.05

#### Performance Specifications

Efficiency [%]	26
Lead Accuracy +/- [in/in]	0.0003
Dynamic Load Capacity [lb]	15312
Static Load Capacity [lb]	49900