


PowerAC 3 3/8"-1 1/2 RA w/Bronze Nut

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerAC 3 3/8"-1 1/2 RA w/Bronze Nut today!

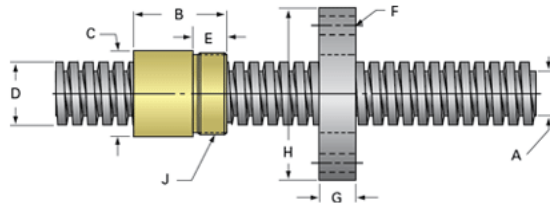

Rolled Inch Acme Screw

Product Info

Screw Code	332-RA
Thread Direction	RH
Screw Material	4140 Series

Details

Lead [in]	0.667
Starts	1
Pitch [in]	0.667
Turns Per Inch	1.5
Threads per Inch	1.5
Thread Code	332
Form	2G
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	65
End Code for Type 4 [* Journals may show tracings of the thread]	39*

Dimensions

A - Root Diameter Minimum [in]	2.652
D - Nominal Rod Diameter [in]	3.375

Part Numbers

3 ft. Part Number	
6 ft. Part Number	12332
12 ft. Part Number	13332
20 ft. Part Number	10332

Performance Specifications

Lead Accuracy +/- [in/in]	0.0006
---------------------------	--------

Weight

Screw Weight [lb./ft.]	20.15
------------------------	-------

Inch Acme Nut with Optional Flange

Product Info

Part Number	20332
Thread Direction	RH
Type	Bronze

Details

Lead [in]	0.667
Starts	1
Pitch [in]	0.667
Turns Per Inch	1.5
Lash (Maximum Axial) [in]	0.020
Nominal Rod Diameter [in]	3.375
Threads per Inch	1.5
Thread Code	332
Form	2G

Dimensions

B [in]	4.50
C [in]	4.50
E [in]	2.00
F (n) Dia. [in]	(6) .781
F BCD [in]	6.250
G [in]	2.02
H [in]	7.38
J [in]	3.625-12

Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.312
-------------------------------	-------

Flange Part Numbers

Flange No-Lash Part Number	73332
Flange Part Number	70740

Weight

Flange Weight [lb]	23.82
Nut Weight [lb]	11.62

Performance Specifications

Efficiency [%]	34
Lead Accuracy +/- [in/in]	0.0006
Dynamic Load Capacity [lb]	60000
Static Load Capacity [lb]	192000