
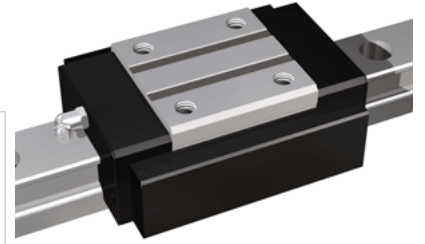


NH55TR Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH55TR Assembly today!

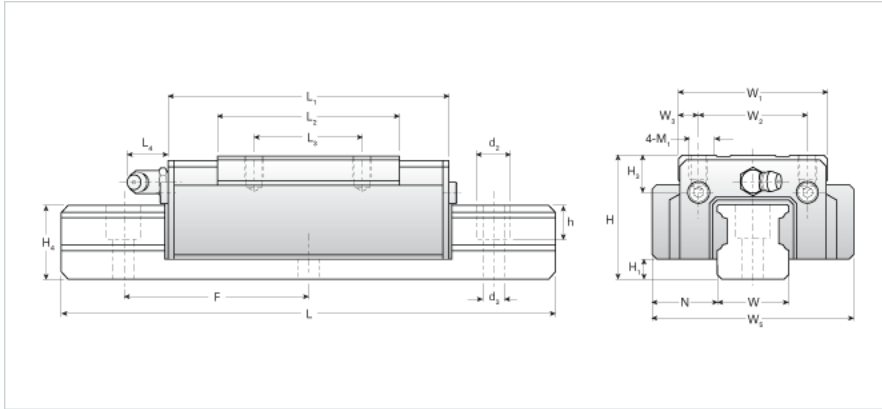

| | |
|--|----------|
| Dimensions | |
| H [mm] | 80 |
| H1 [mm] | 14 |
| N [mm] | 23.5 |
| Metric Profile Rail | |
| Details | |
| Size [mm] | 55 |
| Type | Standard |
| Dimensions | |
| d2 [mm] | 23 |
| d3 [mm] | 16 |
| h [mm] | 24 |
| H4 [mm] | 48 |
| F [mm] | 120 |
| W [mm] | 53 |
| Maximum Length [mm] | 3000 |
| Weight | |
| Weights-Rail [kg/m] | 16.5 |
| Metric Runner Block, Heavy Load, High Speed, 4 Tapped Holes On Runner Block | |
| Details | |
| Size [mm] | 55 |
| Dimensions | |
| H3 [mm] | 18 |
| L1 [mm] | 189 |
| L2 [mm] | 124 |
| L3 [mm] | 75 |
| L4 [mm] | 18 |
| M1 x l | M12X18 |
| W1 [mm] | 100 |
| W2 [mm] | 75 |
| W3 [mm] | 12.5 |
| W5 [mm] | 130 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 90.02 |
| Basic Load Ratings C [lbf] | 20232 |
| Basic Load Ratings C0 [kN] | 137.09 |
| Basic Load Ratings C0 [lbf] | 30811 |
| Static Moment Ratings-Ma [kN-m] | 2.22 |
| Static Moment Ratings-Ma [lb-in] | 19617 |
| Static Moment Ratings-Mb [kN-m] | 2.22 |
| Static Moment Ratings-Mb [lb-in] | 19617 |
| Static Moment Ratings-Mc [kN-m] | 4.25 |
| Static Moment Ratings-Mc [lb-in] | 37671 |
| Weight | |
| Weight-Block [kg] | 4.50 |
| Grease Fitting | |
| Grease Fitting Part Number | B-PT 1/8 |