
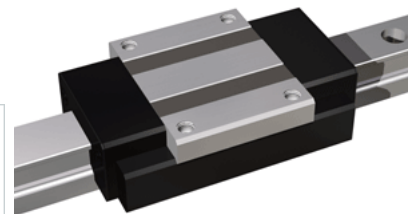


NH65TA Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH65TA Assembly today!

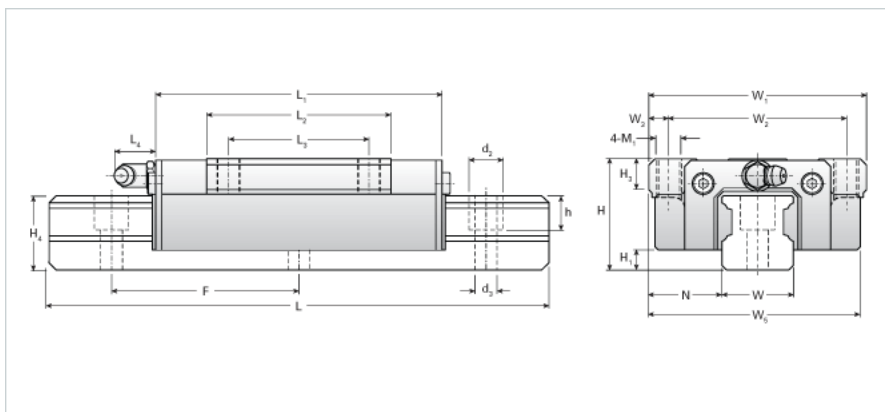

| | |
|--|----------|
| Dimensions | |
| H [mm] | 85 |
| H1 [mm] | 14 |
| N [mm] | 53.5 |
| Metric Profile Rail | |
| Details | |
| Size [mm] | 65 |
| Type | Standard |
| Dimensions | |
| d2 [mm] | 26 |
| d3 [mm] | 18 |
| h [mm] | 25 |
| H4 [mm] | 58 |
| F [mm] | 150 |
| W [mm] | 63 |
| Maximum Length [mm] | 3000 |
| Weight | |
| Weights-Rail [kg/m] | 24.9 |
| Metric Runner Block, Heavy Load, High Speed, 4 Tapped Holes On Flange | |
| Details | |
| Size [mm] | 65 |
| Dimensions | |
| L1 [mm] | 225 |
| L2 [mm] | 148 |
| L3 [mm] | 110 |
| L4 [mm] | 16 |
| M1 x l | M16X29 |
| H3 [mm] | 20 |
| W1 [mm] | 170 |
| W2 [mm] | 142 |
| W3 [mm] | 14 |
| W5 [mm] | 162 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 141.11 |
| Basic Load Ratings C [lbf] | 31714 |
| Basic Load Ratings C0 [kN] | 215.15 |
| Basic Load Ratings C0 [lbf] | 48354 |
| Static Moment Ratings-Ma [kN-m] | 4.21 |
| Static Moment Ratings-Ma [lb-in] | 37237 |
| Static Moment Ratings-Mb [kN-m] | 4.21 |
| Static Moment Ratings-Mb [lb-in] | 37237 |
| Static Moment Ratings-Mc [kN-m] | 7.38 |
| Static Moment Ratings-Mc [lb-in] | 65360 |
| Weight | |
| Weight-Block [kg] | 8.4 |
| Grease Fitting | |
| Grease Fitting Part Number | B-PT 1/8 |