

Product Specification Sheet

NH65TA Assembly

2D/3D CAD

ONLINE


Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH65TA Assembly today!

1

F

T

_____ d_, |___

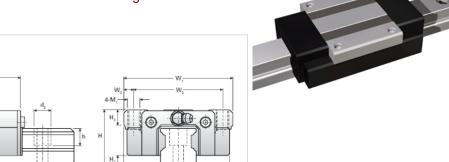

W W,

Dimensions	
H [mm]	85
H1 [mm]	14
N [mm]	53.5
Metric Profile Rail	00.0
(Rail)Details	
Size [mm]	65
Туре	Standard
(Rail)Dimensions	
d2 [mm]	26
d3 [mm]	18
h [mm]	25
H4 [mm]	58
F [mm]	150
W [mm]	63
Maximum Length [mm]	3000
(Rail)Weight	0000
Weights-Rail [kg/m]	24.9
Metric Runner Block, Heavy Load, High Speed, 4 Tapped Holes On Flange	24.5
(Runner Block)Details	
Size [mm]	65
(Runner Block)Dimensions	00
L1 [mm]	225
L2 [mm]	148
L3 [mm]	110
L4 [mm]	16
M1 x l	M16X29
H3 [mm]	20
W1 [mm]	170
W2 [mm]	142
W3 [mm]	14
W5 [mm]	162
(Runner Block)Forces and Torques	102
Basic Load Ratings C [kN]	141.11
Basic Load Ratings C [lbf]	31714
Basic Load Ratings C0 [kN]	215.15
Basic Load Ratings C0 [lbf]	48354
Static Moment Ratings-Ma [kN-m]	4.21
Static Moment Ratings-Ma [Ib-in]	37237
Static Moment Ratings-Mb [kN-m]	4.21
Static Moment Ratings-Mb [lb-in]	37237
Static Moment Ratings-Mc [kN-m]	7.38
Static Moment Ratings-Mc [kN-III] Static Moment Ratings-Mc [lb-in]	65360
(Runner Block)Weight	00000
Weight-Block [kg]	8.4
(Runner Block)Grease Fitting	0.4
INUMER DIOLAUGIERSE FILLING	
Grease Fitting Part Number	B-PT 1/8