


NU15ER Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NU15ER Assembly today!

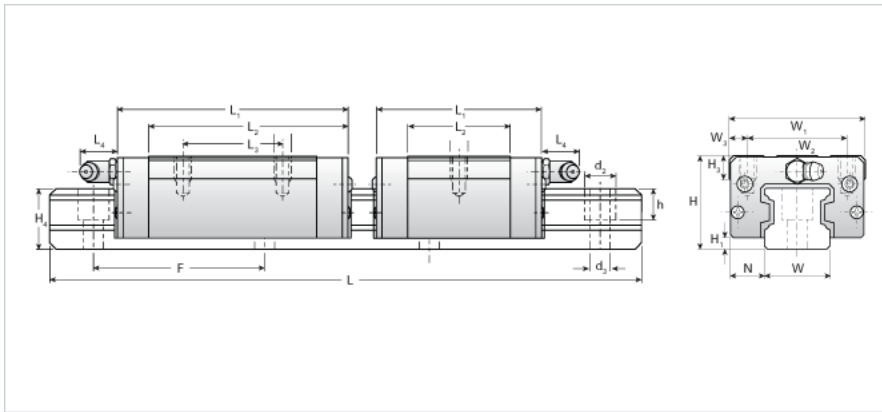

| | |
|--|-----------|
| Dimensions | |
| H [mm] | 24 |
| H1 [mm] | 4.6 |
| N [mm] | 9.5 |
| Metric Profile Rail | |
| Details | |
| Size [mm] | 15 |
| Type | Compact |
| Dimensions | |
| d2 [mm] | 6 |
| d3 [mm] | 3.5 |
| h [mm] | 9 |
| H4 [mm] | 17 |
| F [mm] | 60 |
| W [mm] | 15 |
| Maximum Length [mm] | 1500 |
| Weight | |
| Weights-Rail [kg/m] | 1.7 |
| Metric Runner Block, Heavy Load, Compact Type, 4 Tapped Holes | |
| Details | |
| Size [mm] | 15 |
| Dimensions | |
| L1 [mm] | 58.5 |
| L2 [mm] | 38.5 |
| L3 [mm] | 26 |
| L4 [mm] | 0 |
| H3 [mm] | 6 |
| M1 x l | M4X5 |
| W1 [mm] | 34 |
| W2 [mm] | 26 |
| W3 [mm] | 4 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 8.43 |
| Basic Load Ratings C [lbf] | 1895 |
| Basic Load Ratings C0 [kN] | 13.53 |
| Basic Load Ratings C0 [lbf] | 3041 |
| Static Moment Ratings-Ma [kN-m] | 0.07 |
| Static Moment Ratings-Ma [lb-in] | 608 |
| Static Moment Ratings-Mb [kN-m] | 0.07 |
| Static Moment Ratings-Mb [lb-in] | 608 |
| Static Moment Ratings-Mc [kN-m] | 0.13 |
| Static Moment Ratings-Mc [lb-in] | 1128 |
| Weight | |
| Weight-Block [kg] | 0.13 |
| Grease Fitting | |
| Grease Fitting Part Number | NAS516-1A |