
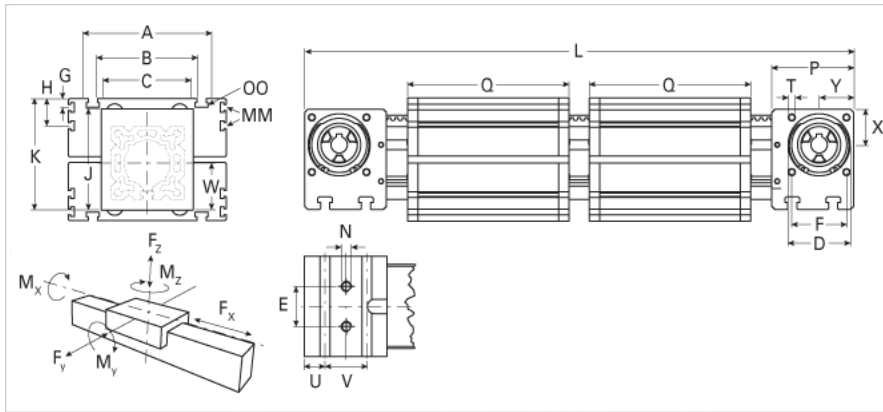


ELZZ 80S WAC

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ELZZ 80S WAC today!

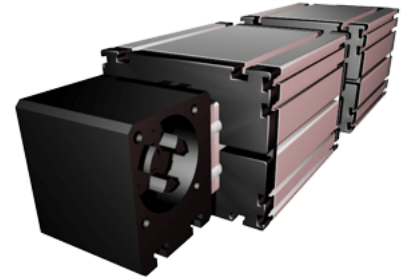

Details

| | |
|---------------------|------|
| Size | 80S |
| Belt | 8M12 |
| mm/Rev | 192 |
| Number of Teeth | 32 |
| Pully Diameter [mm] | 61.1 |

Dimensions

| | |
|---------------------|------|
| Basic Length L [mm] | 650 |
| A [mm] | 190 |
| B [mm] | 126 |
| C [mm] | 100 |
| D [mm] | 68 |
| E [mm] | 40 |
| F [mm] | 60 |
| G [mm] | 12.5 |
| H [mm] | 30 |
| J [mm] | 110 |
| K [mm] | 122 |
| MM | M6 |
| N | M10 |
| OO | M8 |
| P [mm] | 90 |
| Q [mm] | 234 |
| T | M8 |
| U [mm] | 22.5 |
| V [mm] | 45 |
| W [mm] | 51 |
| X [mm] | 39 |
| Y [mm] | 38 |

Speed

| | |
|---------------------|---|
| Speed Maximum [m/s] | 8 |
|---------------------|---|

Forces and Torques

| | |
|-----------------------------|------|
| No-load torque [Nm] | 1.2 |
| Tensile force 0.2 sec [N] | 746 |
| Tensile force permanent [N] | 679 |
| Fx dynamic [N] | 500 |
| Fy dynamic [N] | 3600 |
| Fz dynamic [N] | 2600 |
| Mx dynamic [Nm] | 140 |
| My dynamic [Nm] | 230 |
| Mz dynamic [Nm] | 220 |
| Fx static [N] | 679 |
| Fy static [N] | 4600 |
| Fz static [N] | 3000 |
| Mx static [Nm] | 170 |
| My static [Nm] | 270 |
| Mz static [Nm] | 300 |

Geometrical moments of inertia of aluminum profile

| | |
|--------------------------------------|---------|
| Elastic modulus [N/mm ²] | 70000 |
| Ix [mm ⁴] | 1899000 |
| Iy [mm ⁴] | 1897000 |

Weight

| | |
|-----------------------------------|------|
| Additional Weight per 100 mm [kg] | 1.00 |
|-----------------------------------|------|

