
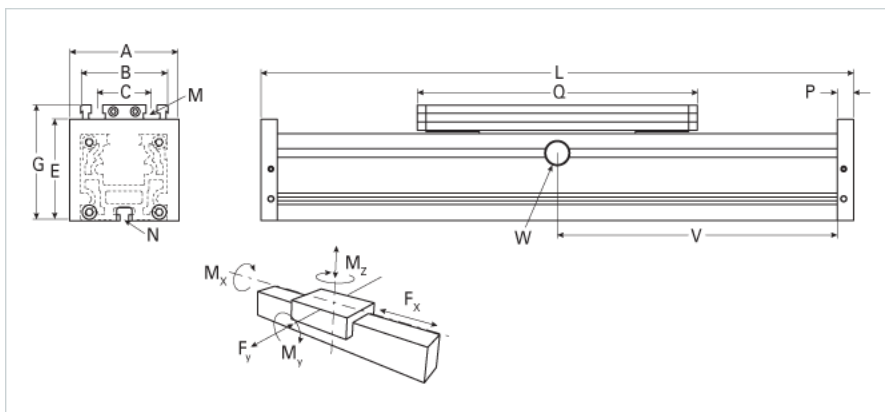


QLR 60 Extended Carriage

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your QLR 60 Extended Carriage today!

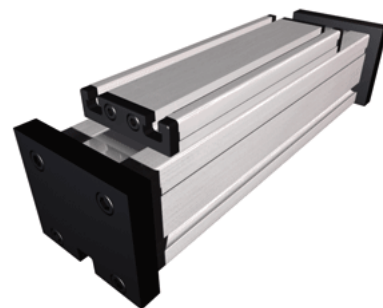

| | |
|---|--------|
| Details | |
| Size | 60 |
| Dimensions | |
| Basic Length L [mm] | 220 |
| A [mm] | 80 |
| B [mm] | 60 |
| C [mm] | 36 |
| E [mm] | 60 |
| G [mm] | 79 |
| M | M6 |
| N | M5 |
| P [mm] | 12 |
| Q [mm] | 192 |
| Speed | |
| Speed Maximum [m/s] | 4 |
| Forces and Torques | |
| Fx dynamic [N] | - |
| Fy dynamic [N] | 500 |
| Fz dynamic [N] | 650 |
| Mx dynamic [Nm] | 10 |
| My dynamic [Nm] | 50 |
| Mz dynamic [Nm] | 30 |
| Fx static [N] | - |
| Fy static [N] | 600 |
| Fz static [N] | 900 |
| Mx static [Nm] | 15 |
| My static [Nm] | 60 |
| Mz static [Nm] | 40 |
| Geometrical moments of inertia of aluminum profile | |
| Elastic modulus [N/mm ²] | 70000 |
| Ix [mm ⁴] | 430000 |
| Iy [mm ⁴] | 480000 |
| Weight | |
| Additional Weight per 100 mm [kg] | 0.36 |
| Basic Weight [kg] | 1.5 |