
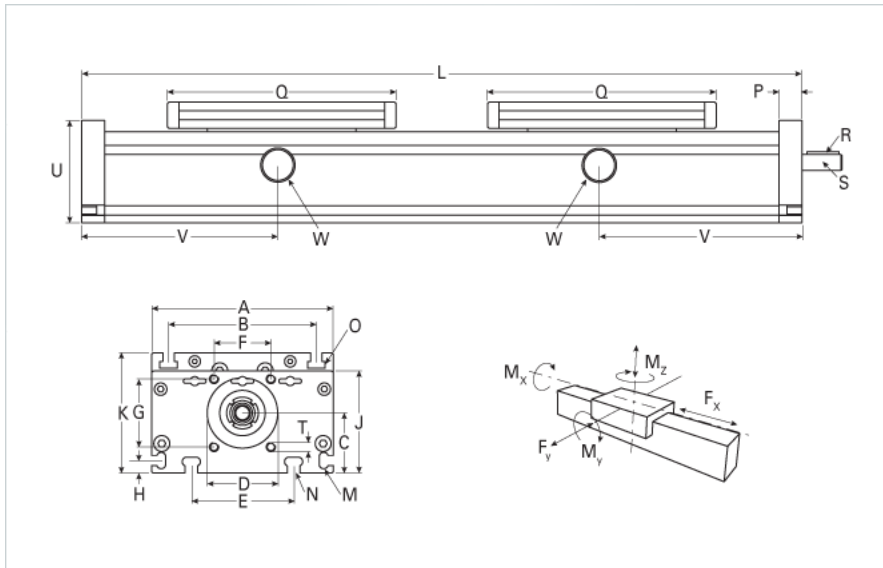


DLK 160 Dual Carriage

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DLK 160 Dual Carriage today!

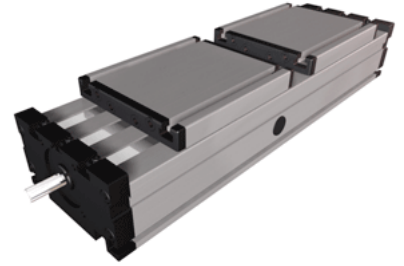

Details

Size

160

Screw Options

25x5/20x20/25x10/25x25

Screw Type

Ball Screw

Dimensions

Basic Length L [mm]

470

A [mm]

160

B [mm]

130

C [mm]

53

D [mm]

62

E [mm]

90

F [mm]

50

G [mm]

60

H [mm]

11

J [mm]

90

K [mm]

106

M

M6

N

M8

O

M8

P [mm]

20

Q [mm]

200

Shaft R Key [mm]

5x5x28

Shaft S Diameter x Length [mm]

14 h6x35

T

M8

U [mm]

80

Forces and Torques

No Load Torque-Dynamic

0.9

F_x dynamic [N]

4000

F_y dynamic [N]

2000

F_z dynamic [N]

2800

M_x dynamic [Nm]

320

M_y dynamic [Nm]

300

M_z dynamic [Nm]

150

F_x static [N]

5000

F_y static [N]

3000

F_z static [N]

3500

M_x static [Nm]

400

M_y static [Nm]

360

M_z static [Nm]

180

Geometrical moments of inertia of aluminum profile

Elastic modulus [N/mm²]

70000

I_x [mm⁴]

2220000

I_y [mm⁴]

12200000

Weight

Additional Weight per 100 mm [kg]

1.96

Basic Weight [kg]

12.0