
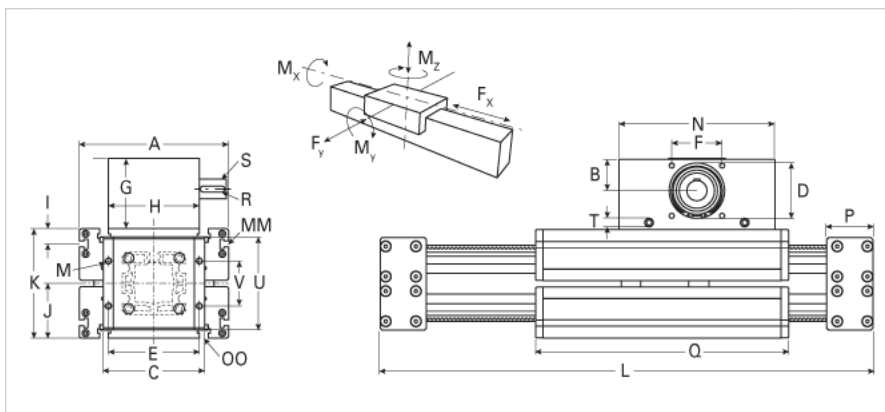


## ELFZex 125 Extended Carriage

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your ELFZex 125 Extended Carriage today!

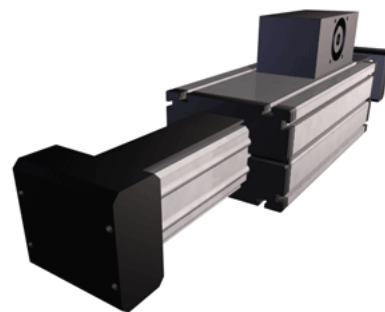

<b>Details</b>	
Size	125
Belt	8M100
mm/Rev	152
Number of Teeth	38
Pully Diameter [mm]	96.8
<b>Dimensions</b>	
Basic Length L [mm]	860
A [mm]	295
B [mm]	62
C [mm]	200
D [mm]	110
E [mm]	180
F [mm]	100
G [mm]	139
H [mm]	180
I [mm]	30
J [mm]	107.5
K [mm]	215
M	M12
MM	M10
N [mm]	310
OO [mm]	M12
P [mm]	92
Q [mm]	640
R [mm]	12x8x50
S [mm]	40x55
T	M10
V [mm]	89
Shaft Diameter and Length [mm]	40 x 55
Key	12x8x50
<b>Speed</b>	
Speed Maximum [m/s]	1
<b>Forces and Torques</b>	
Drive Torque Maximum [Nm]	145
No-load torque [Nm]	2
Fx dynamic [N]	5200
Fy dynamic [N]	7968
Fz dynamic [N]	1752
Mx dynamic [Nm]	352
My dynamic [Nm]	448
Mz dynamic [Nm]	1018
Fx static [N]	6000
Fy static [N]	9960
Fz static [N]	2190
Mx static [Nm]	440
My static [Nm]	560
Mz static [Nm]	1272
<b>Geometrical moments of inertia of aluminum profile</b>	
Elastic modulus [N/mm <sup>2</sup> ]	70000
Ix [mm <sup>4</sup> ]	10150000
Iy [mm <sup>4</sup> ]	10150000
<b>Weight</b>	

---

Additional Weight per 100 mm [kg]

2.70

Basic Weight [kg]

87.5

---