
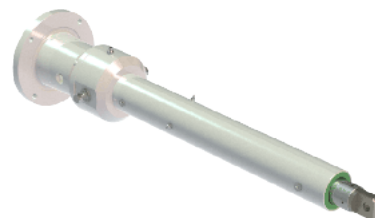


ILA-10 HL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ILA-10 HL today!

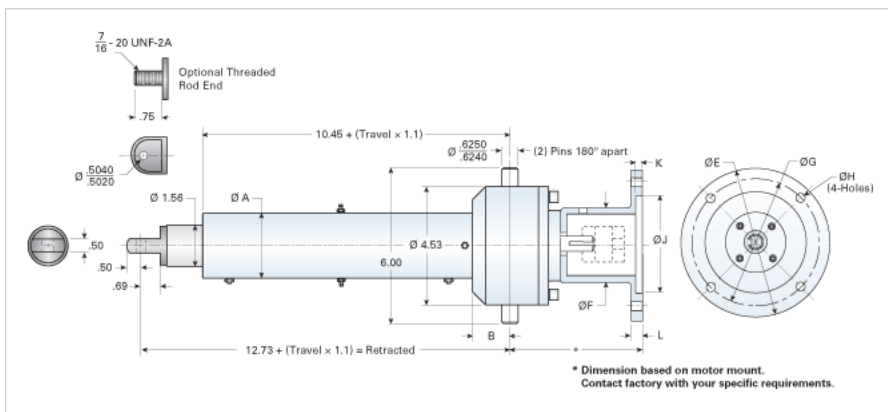

Performance Specifications

Maximum Travel Rate [in/min]	2000
Dynamic Capacity [lb]	1200
Maximum Input Torque [in-lb]	105

Dimensions

A	2.5
B	1.44
C	
D	

Details

Ball Screw	0750-0500 SRT
Input Turns per Inch Of Travel	2
Torque to Raise 1 lb. [in-lb]	0.088
Screw Lead [in]	0.500
Root Diameter [in]	0.602
Max Capacity [lb]	1200
Max HP [hp]	2
Gear Ratio	1:1

Weight

Basic Weight [lb]	32
Per Inch of Travel [lb]	0.98