


ILA-25 HL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ILA-25 HL today!

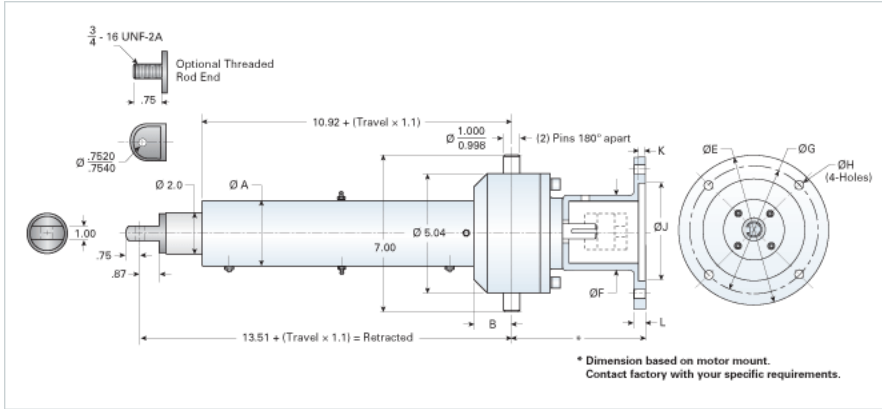

Performance Specifications

Maximum Travel Rate [in/min]	3000
Dynamic Capacity [lb]	2200
Maximum Input Torque [in-lb]	390

Dimensions

A	3
B	1.5
C	
D	

Details

Ball Screw	1000-1000 SRT
Input Turns per Inch Of Travel	1
Torque to Raise 1 lb. [in-lb]	0.177
Screw Lead [in]	1.000
Root Diameter [in]	0.820
Max Capacity [lb]	2200
Max HP [hp]	2
Gear Ratio	1:1

Weight

Basic Weight [lb]	47
Per Inch of Travel [lb]	1.29