
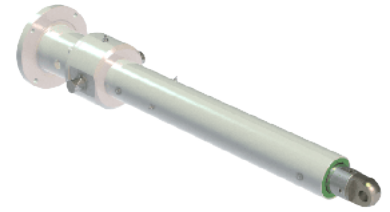


ILA-25 ML

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ILA-25 ML today!

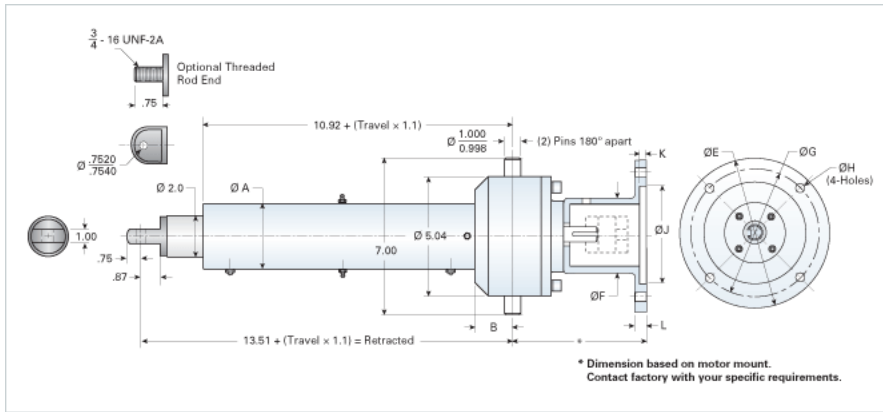

Performance Specifications

| | |
|------------------------------|------|
| Maximum Travel Rate [in/min] | 1500 |
| Dynamic Capacity [lb] | 3500 |
| Maximum Input Torque [in-lb] | 308 |

Dimensions

| | |
|---|-----|
| A | 3 |
| B | 1.5 |
| C | |
| D | |

Details

| | |
|--------------------------------|---------------|
| Ball Screw | 1000-0500 SRT |
| Input Turns per Inch Of Travel | 2 |
| Torque to Raise 1 lb. [in-lb] | 0.088 |
| Screw Lead [in] | 0.500 |
| Root Diameter [in] | 0.820 |
| Max Capacity [lb] | 3500 |
| Max HP [hp] | 2 |
| Gear Ratio | 1:1 |

Weight

| | |
|-------------------------|------|
| Basic Weight [lb] | 47 |
| Per Inch of Travel [lb] | 1.29 |