
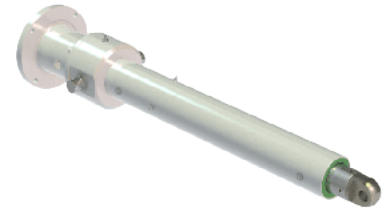


## ILA-25 ML

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your ILA-25 ML today!

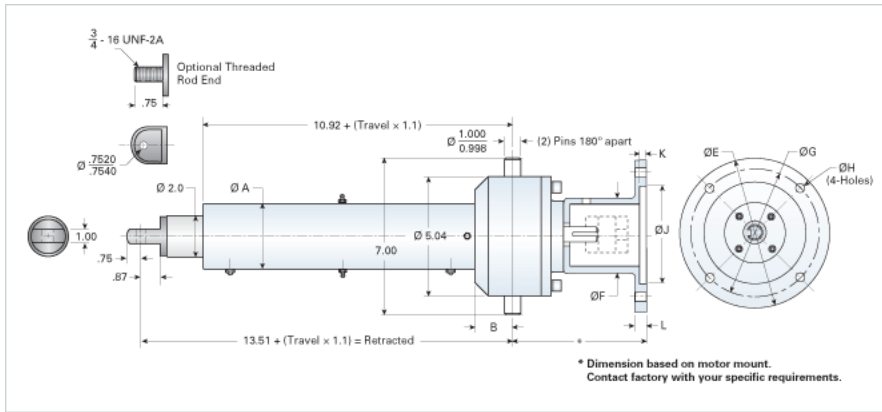

### Performance Specifications

Maximum Travel Rate [in/min]	1500
Dynamic Capacity [lb]	3500
Maximum Input Torque [in-lb]	308

### Dimensions

A	3
B	1.5
C	
D	

### Details

Ball Screw	1000-0500 SRT
Input Turns per Inch Of Travel	2
Torque to Raise 1 lb. [in-lb]	0.088
Screw Lead [in]	0.500
Root Diameter [in]	0.820
Max Capacity [lb]	3500
Max HP [hp]	2
Gear Ratio	1:1

### Weight

Basic Weight [lb]	47
Per Inch of Travel [lb]	1.29