


ILA-100 HL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ILA-100 HL today!

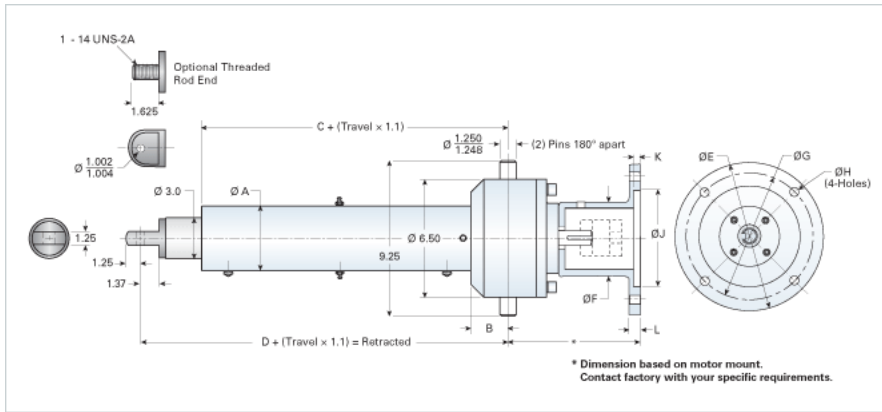

Performance Specifications

Maximum Travel Rate [in/min]	2000
Dynamic Capacity [lb]	4600
Maximum Input Torque [in-lb]	814

Dimensions

A	4
B	2.5
C	14.18
D	17.14

Details

Ball Screw	1500-1000 SRT
Input Turns per Inch Of Travel	1
Torque to Raise 1 lb. [in-lb]	0.177
Screw Lead [in]	1.000
Root Diameter [in]	1.140
Max Capacity [lb]	4600
Max HP [hp]	5
Gear Ratio	1:1

Weight

Basic Weight [lb]	89
Per Inch of Travel [lb]	2.08