ActionJac ILAK-5 HL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac ILAK-5 HL today!

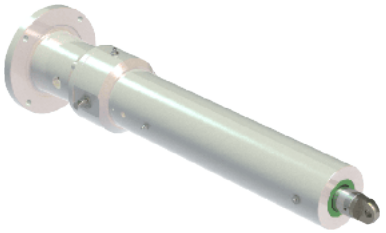

2D/3D CAD ONLINE

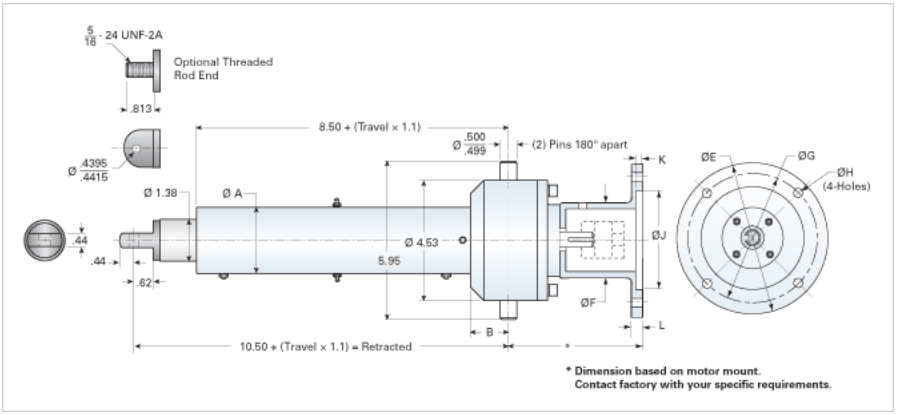

Performance Specifications	
Maximum Travel Rate [in/min]	2377
Dynamic Capacity [lb]	1000
Maximum Input Torque [in-lb]	88
Dimensions	
A	3.5
B	1.1
C	16
D	19
Details	
Ball Screw	0631-0500 SRT
Input Turns Per Inch Of Travel	2
Torque Per Lb. [in-lb]	0.088
Screw Lead [in]	0.500
Root Diameter [in]	0.500
Max Capacity [lb]	1000
Max HP [hp]	1
Gear Ratio	1:1
Weight	
Basic Weight [lb]	29
Per Inch of Travel [lb]	0.87